



Company:		
Job:	#Item:	
Notes:		

4"x2" Handy Boxes, 1-7/8" Deep Drawn with Conduit KO's, Raised Ground



APPLICATIONS

- Handy boxes, also called utility boxes, are used for convenience outlets, switch boxes or small junction boxes
- They are popular for exposed work applications (surface mounted wiring)
- The NEC requires that surface-mounted wiring be enclosed with a protective covering such as EMT conduit

PRODUCT FEATURE

Material: Steel

COMPLIANCES

All single gang, two gang, 4 in. square, and single gang gangable UL listed steel boxes are acceptable for use in 2-hour fire rated walls.

FIRE RESISTANCE

Acceptable for use in 2-hour rated walls

GENERAL PRODUCT INFORMATION

Wiring System: _____ Conduit

CONFIGURATION

• End Knockouts:	(2) 3/4 in.
• Bracket Type:	No Bracket
Drawn or Welded:	Drawn
Raised Ground:	Yes
Side Knockout(s):	(4) 3/4 in.
Bottom Knockouts(s):	(2) 3/4 in.

DRAWING DIMENSIONS


Dimension A: _____ 1-7/8 in.

PRODUCT MEASUREMENTS

• Depth:	1-7/8 in.
• Cubic Inches (cm3):	13.0 (213.0)
• Wt. Ea. (Lbs.):	0.473
Product Length (in.):	1.94
 Product Width (in.): 	4.00
Product Height (in.):	2.13

PACKAGING

* PNG	30
• UPC Number:	837654062869

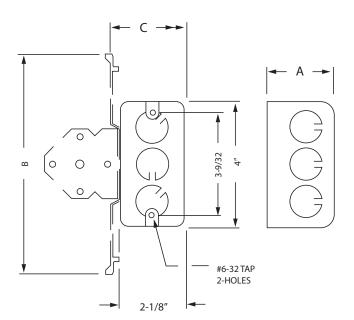



ELECTRICAL BOXES & COVERS

