



CATEGORY

WIRING &  
DEVICES

AMMO ITEM #

303P3WSF

Company: \_\_\_\_\_

Job: \_\_\_\_\_ #Item: \_\_\_\_\_

Notes: \_\_\_\_\_

# Industrial Receptacle



## SPECIFICATIONS

- Color: \_\_\_\_\_ Black
- Rating: \_\_\_\_\_ 30A, 125/250VAC
- NEMA: \_\_\_\_\_ 10-30R
- Pole: \_\_\_\_\_ 3
- Wire: \_\_\_\_\_ 3
- Termination: \_\_\_\_\_ Back
- Dielectric Voltage: \_\_\_\_\_ Withstands 2000V per UL498
- Face Material: \_\_\_\_\_ Thermoplastic PA
- Body Material: \_\_\_\_\_ Thermoplastic PA

## MATERIAL CHARACTERISTICS


- Environmental: Flammability, UL-94, Rated V0
- Operating Temperature: -40° F to 167° F (-40° C to 75° C)

## FEATURES

- Made of durable thermoplastic
- Heavy-gauge, double-wipe copper alloy contacts
- Easy-to-wire terminals accept up to No. 4 AWG conductors
- Terminals marked for easy identification and fast wiring
- All mounting hardware included
- Flush-mount devices fit single or two-gang outlet boxes

## PACKAGING

- Weight: \_\_\_\_\_ 136 g
- Inner: \_\_\_\_\_ 10
- Master: \_\_\_\_\_ 100
- UPC Number: \_\_\_\_\_ 837654105078

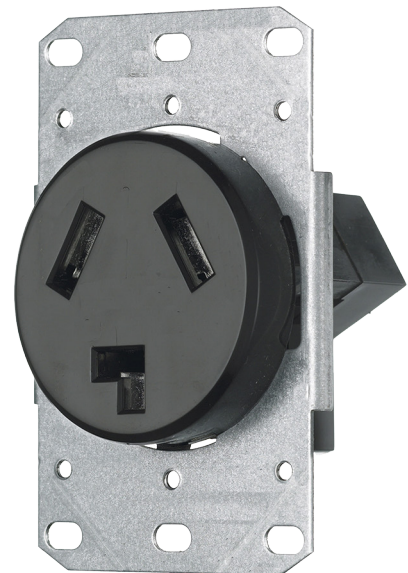

## WIRING & DEVICES



Ammo Electric Inc.

400 MARTIN LUTHER KING JR WAY, BRIDGETON, NJ 08302  
PHONE : (718).338.1851 FAX : (718).228.1851  
orders@ammoelectric.com

www.ammoelectric.com