



CATEGORY
**ELECTRICAL
BOXES**

AMMO ITEM #

AR674

Company: _____

Job: _____ #Item: _____

Notes: _____

4"x2" Handy Boxes, 2-1/8" Deep Welded with Conduit KO's



APPLICATIONS

Handy boxes, also called utility boxes, are used for convenience outlets, switch boxes or small junction boxes

MATERIAL

Steel

FIRERESISTANCE

Acceptable for use in 2-hour rated walls

GENERAL PRODUCT INFORMATION

Wiring System: _____ Conduit

CONFIGURATION

- Bracket Type: _____ No Bracket
- Drawn or Welded: _____ Welded
- Raised Ground: _____ No
- Side Knockout(s): _____ (6) 3/4 in.
- Bottom Knockouts(s): _____ (2) 3/4 in.

DRAWING DIMENSIONS


Dimension A: 2-1/8 in.

PRODUCT MEASUREMENTS

- Depth: _____ 2-1/8 in.
- Cubic Inches (cm³): _____ 16.5 (270.4)
- Wt. Ea. (Lbs.): _____ 0.612
- Product Length (in.): _____ 2.19
- Product Width (in.): _____ 4.00
- Product Height (in.): _____ 2.13

PACKAGING

- PKG: _____ 50
- UPC Number: _____ 837654073148

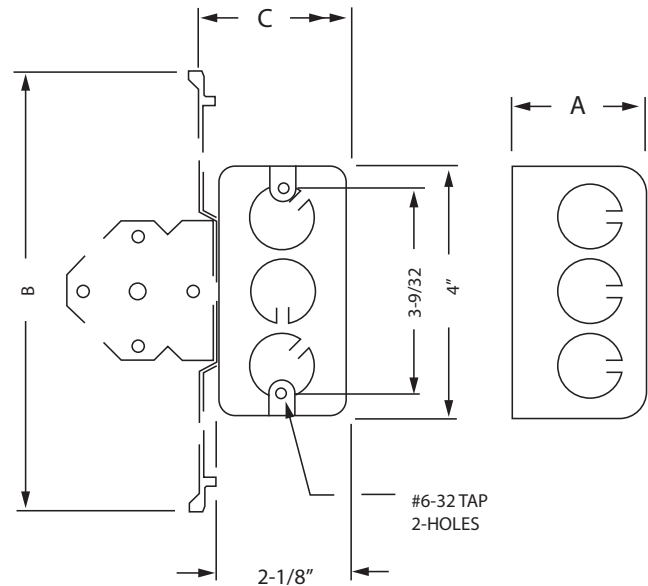

ELECTRICAL BOXES & COVERS



400 MARTIN LUTHER KING JR WAY, BRIDGETON, NJ 08302
PHONE : (718).338.1851 FAX : (718).228.1851
orders@ammoelectric.com

www.ammoelectric.com