



CATEGORY
**STRUT &
 GROUND**
 AMMO ITEM #

ARBARREL-S

Company: _____
 Job: _____ #Item: _____
 Notes: _____

Compression Lugs Splices Short Barrel



AMMO#	WIRE RANGE	COLOR CODE	A (in)	B (mm)	WEIGHT (g)	INNER	MASTER	UPC
ARBARREL-8S	#8	Red	.90	.17	4.35	100	1000	837654122679
ARBARREL-6S	#6	Blue	1.00	.20	5.00	100	1000	837654122686
ARBARREL-4S	#4	Gray	1.00	.25	5.94	100	1000	837654122693
ARBARREL-2S	#2	Brown	1.25	.31	10.79	100	1000	837654122709
ARBARREL-1S	#1	Green	1.60	.39	18.05	50	500	837654122716
ARBARREL-10S	1/0	Pink	1.75	.44	20.82	50	500	837654122723
ARBARREL-20S	2/0	Black	1.75	.49	23.64	50	500	837654122730
ARBARREL-30S	3/0	Orange	1.90	.55	27.93	50	500	837654122747
ARBARREL-40S	4/0	Purple	2.00	.59	36.69	25	250	837654122754
ARBARREL-250S	250 MCM	Yellow	2.10	.66	46.69	25	250	837654122761
ARBARREL-350S	350 MCM	Red	2.10	.70	63.03	20	200	837654122778
ARBARREL-400S	400 MCM	Blue	2.30	.76	80.23	10	100	837654122785
ARBARREL-500S	500 MCM	Brown	2.50	.83	119.28	10	100	837654122792
ARBARREL-600S	600 MCM	Green	2.50	.93	153.50	5	50	837654122808
ARBARREL-750S	750 MCM	Black	3.21	1.03	230.76	5	50	837654122815

APPLICATIONS

- Suitable for use at voltages up to 35 KV provided connector is properly taped
- 5 KV is the maximum voltage in all bare splice applications
- Rated for copper conductors

FEATURES


- Color coded
- Tin-plated to provide corrosion resistance
- Seamless, high conductivity copper tubing, suitable for heavy duty applications

MATERIAL

E-Copper

FINISH

Tin plated

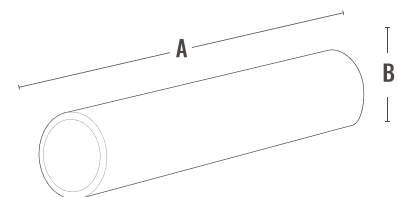

STRUT & GROUND



400 MARTIN LUTHER KING JR WAY, BRIDGETON, NJ 08302
 PHONE : (718).338.1851 FAX : (718).228.1851
 orders@ammoelectric.com

www.ammoelectric.com