



CATEGORY
**ELECTRICAL
FITTINGS**

AMMO ITEM #

ARGL

Company: _____
Job: _____ #Item: _____
Notes: _____

Grounding Locknuts



Bonding Locknuts

APPLICATION

Used in harsh vibration environments to fasten threaded conduit to opening in a box or enclosure

FEATURE


Can be used in harsh vibration environments

MATERIAL

Zinc plated steel

CERTIFICATION

- UL-467&514B
- CAN / CSA-C22.2 18.3-04

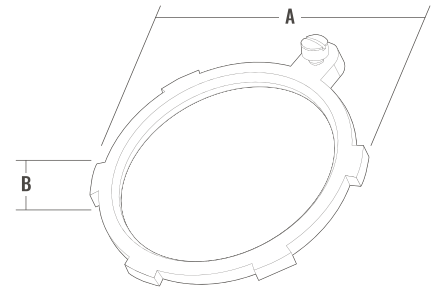

AMMO#	SIZE	A (in)	B (in)	WEIGHT (g)	INNER	MASTER	UPC
ARGL-50	1/2"	1.14	0.17	11.1	100	1000	837654089996
ARGL-75	3/4"	1.39	0.18	14.3	100	1000	837654090008
ARGL-100	1"	1.73	0.24	18.7	50	500	837654090015
ARGL-125	1-1/4"	2.05	0.24	25.5	50	500	837654090022
ARGL-150	1-1/2"	2.4	0.25	26.9	25	250	837654090039
ARGL-200	2"	2.91	0.29	36	20	200	837654090046
ARGL-250	2-1/2"	3.46	0.29	46	-	50	837654090053
ARGL-300	3"	4.14	0.3	65.1	-	50	837654090060
ARGL-350	3-1/2"	4.69	0.3	77.3	-	25	837654090077
ARGL-400	4"	5.25	0.34	88.1	-	25	837654090084

ELECTRICAL FITTINGS



400 MARTIN LUTHER KING JR WAY, BRIDGETON, NJ 08302
PHONE : (718).338.1851 FAX : (718).228.1851
orders@ammoelectric.com

www.ammoelectric.com