



CATEGORY  
**ELECTRICAL  
FITTINGS**

AMMO ITEM #

**ARLTCN45**  
38MI-400MI

Company: \_\_\_\_\_  
Job: \_\_\_\_\_ #Item: \_\_\_\_\_  
Notes: \_\_\_\_\_

## Liquid Tight 45° Connector Malleable Iron



### APPLICATIONS

- To secure, ground and seal liquid-tight flexible metal conduit to boxes and enclosures
- Connects conduit and terminates bonding conductor run externally across liquid-tight conduit

### FEATURES

- Tapered threaded male hub NPT
- Compact, slim diameter with small turning radius
- Furnished with an insulated throat with steel locknut and sealing ring
- Suitable for wet locations
- Long ferrule prevents pullout and tight bend conduit "pop-out"
- RoHS compliant

### MATERIALS



- Malleable iron
- Steel locknut

### CERTIFICATIONS

- UL Standards: 514B
- CUL Standard: C22.2 No.18.3-12
- Fed. Spec. W-F-408E
- NEMA: FB-1

### FINISHES

- Malleable iron - electro zinc plated and chromate coated
- Steel - electro zinc plated and chromate coated
- PE, PP, Alum - natural

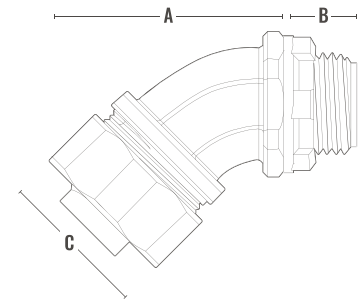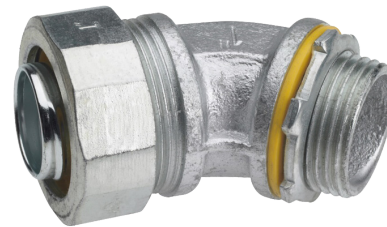

AMMO#	SIZE	A (in)	B (in)	C (in)	WEIGHT (kg)	INNER	MASTER	UPC
ARLTCN45-38MI	3/8"	2.071	0.536	1.120	0.100	10	100	837654104286
ARLTCN45-50MI	1/2"	2.071	0.543	1.241	0.120	10	100	837654104293
ARLTCN45-75MI	3/4"	2.341	0.580	1.503	0.170	10	100	837654104309
ARLTCN45-100MI	1"	2.836	0.675	1.763	0.240	5	50	837654104316
ARLTCN45-125MI	1-1/4"	3.388	0.695	2.248	0.420	2	20	837654104323
ARLTCN45-150MI	1-1/2"	3.447	0.694	2.471	0.500	2	20	837654104330
ARLTCN45-200MI	2"	4.178	0.729	3.007	0.727	2	20	837654104347
ARLTCN45-250MI	2-1/2"	6.109	1.056	3.654	1.713	-	1	837654104354
ARLTCN45-300MI	3"	6.588	1.104	4.471	2.140	-	1	837654104361
ARLTCN45-350MI	3-1/2"	7.022	1.163	4.942	3.190	-	1	837654104378
ARLTCN45-400MI	4"	7.848	1.155	5.501	3.975	-	1	837654104385

## ELECTRICAL FITTINGS



400 MARTIN LUTHER KING JR WAY, BRIDGETON, NJ 08302  
PHONE : (718).338.1851 FAX : (718).228.1851  
orders@ammoelectric.com

www.ammoelectric.com