



CATEGORY

ELECTRICAL
FITTINGS

AMMO ITEM #

ARLTCN45-MI

Company: _____

Job: _____ #Item: _____

Notes: _____

45° Liquid Tight Connector Malleable Iron



APPLICATIONS

- To secure, ground and seal liquid-tight flexible metal conduit to boxes and enclosures
- Connects conduit and terminates bonding conductor run externally across liquid-tight conduit

FEATURES

- Tapered threaded male hub NPT
- Compact, slim diameter with small turning radius
- Furnished with an insulated throat with steel locknut and sealing ring
- Suitable for wet locations
- Long ferrule prevents pullout and tight bend conduit "pop-out"
- RoHS compliant

MATERIALS



- Malleable iron
- Steel locknut

CERTIFICATIONS

- UL Standards: 514B
- CUL Standard: C22.2 No.18.3-12
- Fed. Spec. W-F-408E
- NEMA: FB-1

FINISHES

- Malleable iron - electro zinc plated and chromate coated
- Steel - electro zinc plated and chromate coated
- PE, PP, Alum - natural

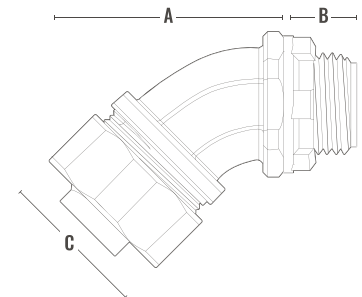

AMMO#	SIZE	A (in)	B (in)	C (in)	WEIGHT (lb)	INNER	MASTER	UPC
ARLTCN45-38MI	3/8"	2.071	0.536	1.120	0.22	10	100	840526221073
ARLTCN45-50MI	1/2"	2.071	0.543	1.241	0.26	10	100	840526221080
ARLTCN45-75MI	3/4"	2.341	0.580	1.503	0.37	10	100	840526221097
ARLTCN45-100MI	1"	2.836	0.675	1.763	0.53	5	50	840526221103
ARLTCN45-125MI	1-1/4"	3.388	0.695	2.248	0.93	2	20	840526221110
ARLTCN45-150MI	1-1/2"	3.447	0.694	2.471	1.10	2	20	840526221127
ARLTCN45-200MI	2"	4.178	0.729	3.007	1.60	2	20	840526221134
ARLTCN45-250MI	2-1/2"	6.109	1.056	3.654	3.78	-	1	840526221141
ARLTCN45-300MI	3"	6.588	1.104	4.471	4.72	-	1	840526221158
ARLTCN45-350MI	3-1/2"	7.022	1.163	4.942	7.03	-	1	840526221165
ARLTCN45-400MI	4"	7.848	1.155	5.501	8.76	-	1	840526221172

ELECTRICAL FITTINGS



1000 COMMERCE CENTER DR ELKTON MD 21921
PHONE : (718).338.1851 FAX : (718).228.1851
orders@ammoelectric.com

www.ammoelectric.com