



CATEGORY
**ELECTRICAL
FITTINGS**

AMMO ITEM #

ARLTCN90-I

Company: _____

Job: _____ #Item: _____

Notes: _____

90° Liquidtight Connectors Insulated



APPLICATION


For use with metallic and non-metallic "Type B" liquidtight conduit

FEATURES

- Assembled with a die cast locknut
- Liquidtight, raintight, oiltight
- Insulated throat protects against abrasion damage

MATERIAL

Zinc die cast

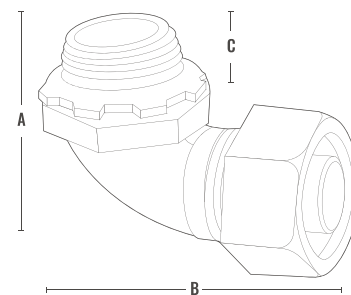

| AMMO# | SIZE | A (in) | B (in) | C (in) | WEIGHT (g) | INNER | MASTER | UPC |
|---------------|--------|--------|--------|--------|------------|-------|--------|--------------|
| ARLTCN90-50I | 1/2" | 2.22 | 2.34 | .52 | 84.1 | 10 | 100 | 837654068496 |
| ARLTCN90-75I | 3/4" | 2.55 | 3.55 | .68 | 105.1 | 10 | 100 | 837654068502 |
| ARLTCN90-100I | 1" | 2.82 | 3.785 | .67 | 185.9 | 5 | 50 | 837654068519 |
| ARLTCN90-125I | 1-1/4" | 3.362 | 3.96 | .70 | 297.9 | 2 | 20 | 837654068526 |
| ARLTCN90-150I | 1-1/2" | 3.45 | 4.13 | .70 | 375 | 2 | 20 | 837654068533 |
| ARLTCN90-200I | 2" | 4.036 | 4.70 | .57 | 500 | 1 | 10 | 837654068540 |

ELECTRICAL FITTINGS



400 MARTIN LUTHER KING JR WAY, BRIDGETON, NJ 08302
PHONE : (718).338.1851 FAX : (718).228.1851
orders@ammoelectric.com

www.ammoelectric.com