



CATEGORY
**ELECTRICAL
FITTINGS**

AMMO ITEM #

ARMC-50

Company: _____
Job: _____ #Item: _____
Notes: _____

1/2" Cable Connector BX-Flex NM & MC



FEATURES

- No locknut required
- Single-unit or duplex construction with captive clamp

APPLICATIONS

Use to join sheathed cable into outlet boxes or enclosures

MATERIAL


Steel

FINISH

Zinc plated


APPLICABLE THIRD PARTY STANDARDS

- UL Standard: UL 514B
- Fed. Spec: W-F-406E



AMMO#	SIZE	A (in)	B (in)	C (in)	WEIGHT (g)	INNER	MASTER	UPC
ARMC-50	1/2"	1.385	0.913	0.67	33.6	25	250	837654086032

CABLE TYPE	CABLE SIZE	OPENING MAX.	OPENING MIN.	WIRE BUNDLE DIA. MIN.	WIRE BUNDLE DIA. MAX.
AC Steel	14-2 - 10-3	0.565	0.475	0.210	0.330
AC Steel HCF	14-2 - 10-3	0.565	0.475	0.220	0.360
AC Aluminum	14-2 - 10-3	0.610	0.464	0.210	0.330
AC Alum HCF	14-2 - 10-3	0.610	0.464	2.220	0.360
MCI Steel	14-2 - 10-3	0.565	0.455	0.220	0.360
MCI Aluminum	14-2 - 10-3	0.600	0.455	0.220	0.360
MCI-A	14-2 - 10-3	0.510	0.385	0.220	0.345
MCI-A HCF	14-2 - 10-3	0.510	0.385	0.240	0.430
MC-PCS Steel	12/2 - 12/3	0.610	0.529	0.360	0.380
MC-PCS Aluminum	12/2 - 12/3	0.610	0.529	0.360	0.380
Flex Conduit	3/8	0.610	0.560	-	-

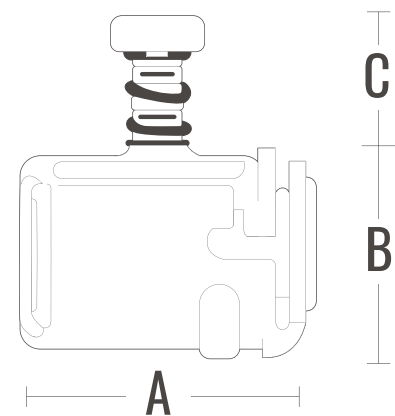

ELECTRICAL FITTINGS



400 MARTIN LUTHER KING JR WAY, BRIDGETON, NJ 08302
PHONE : (718).338.1851 FAX : (718).228.1851
orders@ammoelectric.com

www.ammoelectric.com