



CATEGORY

**NEC (Nipples,
Elbows & Couplings)**

AMMO ITEM #

**Rigid 15°
Elbow**

Company: _____




Job: _____ #Item: _____

Notes: _____

Rigid 15° Standard Elbow



| AMMO# | SIZE | A | B | C | OD (in) | THICKNESS T (in) | STRAIGHT LENGTH L (in) | RADIUS R (in) | WEIGHT (g) | PKG | UPC |
|------------|--------|--------|-------|--------|-------------|------------------|------------------------|---------------|------------|-----|--------------|
| ARRE-12515 | 1-1/4" | 7.03 | 0.926 | 7.091 | 1.510±0.005 | 0.063 | 2.721 | 7.25 | 665 | 20 | 837654090480 |
| ARRE-15015 | 1-1/2" | 8.14 | 1.072 | 8.21 | 1.740±0.005 | 0.063 | 3.169 | 8.25 | 912 | 15 | 837654090497 |
| ARRE-20015 | 2" | 8.906 | 1.172 | 8.983 | 2.197±0.005 | 0.063 | 3.424 | 9.5 | 1457 | 10 | 837654090503 |
| ARRE-25015 | 2-1/2" | 12.328 | 1.623 | 12.435 | 2.875±0.010 | 0.072 | 5.078 | 10.5 | 2634 | 50 | 837654090510 |
| ARRE-30015 | 3" | 14.212 | 1.871 | 14.335 | 3.500±0.015 | 0.072 | 5.748 | 13 | 3793 | 35 | 837654090527 |
| ARRE-35015 | 3-1/2" | 15.129 | 1.992 | 15.26 | 4.000±0.020 | 0.083 | 5.984 | 15 | 5488 | 35 | 837654090534 |
| ARRE-40015 | 4" | 17.487 | 2.302 | 17.638 | 4.500±0.020 | 0.083 | 7.085 | 16 | 6899 | 35 | 837654090541 |

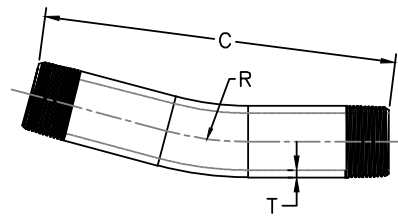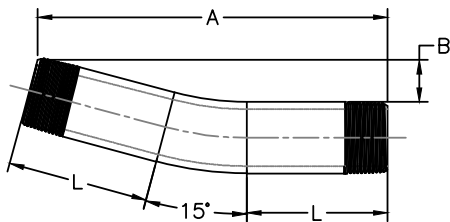

FEATURES

- Low conductivity, high corrosion resistance
- Smooth defect free interior and exterior

MATERIAL

Galvanized steel

FINISH

Hot dip galvanized

APPLICATIONS

- For a secure connection to Rigid conduit; bend enables directional changes in conduit

NEC (Nipples, Elbows & Couplings)



400 MARTIN LUTHER KING JR WAY, BRIDGETON, NJ 08302
PHONE : (718).338.1851 FAX : (718).228.1851
orders@ammoelectric.com

www.ammoelectric.com