



CATEGORY
**ELECTRICAL
 FITTINGS**
 AMMO ITEM #
ARWTH

Company: _____
 Job: _____ #Item: _____
 Notes: _____

Rigid Watertight Hubs



APPLICATIONS

- Used to connect threaded Rigid or IMC conduit to a load center or other metal enclosure where a watertight joint is required at knockouts or slip-fit holes
- May be used in wet or dry locations
- Resistant to a variety of chemicals (acetic, citric and salt water)

FEATURES


- Oil-tight
- Oversized locknut protects against damage from vibrations and promotes positive grounding
- Insulated throat protects wires and reduces wire pulling effort
- O-ring seals the assembly and provides a raintight seal
- Tapered female threads for rigid/IMC conduit
- Color: natural

MATERIALS

- Body: zinc die cast
- Nut: zinc die cast
- Gasket: neoprene

CERTIFICATIONS

- UL-514B
- CSA Standard C22.2 No.18.3-12

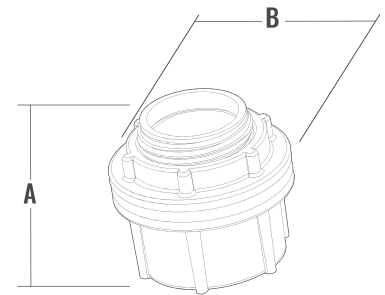

AMMO#	SIZE	A (in)	B (in)	WEIGHT (g)	INNER	MASTER	UPC
ARWTH-50	1/2"	1.13	1.51	54	25	250	837654065594
ARWTH-75	3/4"	1.37	1.73	118	10	100	837654065600
ARWTH-100	1"	1.59	2.04	161	10	100	837654065617
ARWTH-125	1-1/4"	1.59	2.42	200	2	20	837654065624
ARWTH-150	1-1/2"	1.59	2.79	252	2	20	837654065631
ARWTH-200	2"	1.59	3.30	349	2	20	837654065648
ARWTH-250	2-1/2"	2.44	3.70	565	2	20	837654065655
ARWTH-300	3"	2.44	4.39	873	-	1	837654065662
ARWTH-350	3-1/2"	2.44	4.88	989	-	1	837654088364
ARWTH-400	4"	2.44	5.50	1188	-	1	837654065679

ELECTRICAL FITTINGS



400 MARTIN LUTHER KING JR WAY, BRIDGETON, NJ 08302
 PHONE : (718).338.1851 FAX : (718).228.1851
 orders@ammoelectric.com

www.ammoelectric.com