



CATEGORY  
**ELECTRICAL  
CONDUIT & WIRES**

AMMO ITEM #

**FLXAL-S**

Company: \_\_\_\_\_  
Job: \_\_\_\_\_ #Item: \_\_\_\_\_  
Notes: \_\_\_\_\_

# Flexible Aluminum Conduit Reel



## APPLICATIONS


- Aluminum series is UL listed for full trade size This is the series of reduced wall; lightweight Flexible Metal Conduit manufactured with aluminum strip
- Completely meet with UL standard
- When using for electrical installation, shall refer to the regulation of NEC

## FEATURES


- Tensile test: within on minute, bear and apply 1334 N without cracks
- Structure: \_\_\_\_\_ Square-lock
- Qualify range: \_\_\_\_\_ -50°C + 200°C
- IP Rating: \_\_\_\_\_ IP40
- Flexibility: \_\_\_\_\_ High
- RoHS Certificate: \_\_\_\_\_ Yes
- Reach: \_\_\_\_\_ Yes
- Certificate: UL: \_\_\_\_\_ 3/8" - 4"
- cULus: \_\_\_\_\_ 3/8"

## MATERIAL

Aluminum



DETAIL A

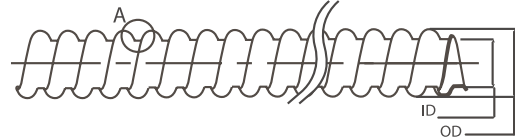

AMMO#	SIZE	BENDING DIAMETER	ID (mm)		OD (mm)		WEIGHT (kg / Coil)	PKG	UPC
			MIN	MAX	MIN	MAX			
FLXAL-38S	3/8"	50	9.52	9.96	14.22	15.49	33.5	1000	837654119686
FLXAL-50S	1/2"	75	15.8	16.38	21.84	23.37	48.9	1000	837654119693
FLXAL-75S	3/4"	100	20.62	21.21	26.54	28.07	73.1	1000	837654119709
FLXAL-100S	1"	125	25.4	26.42	33.02	35.05	97.5	1000	837654119648
FLXAL-125S	1-1/4"	160	33.02	31.75	39.37	41.40	118.8	1000	837654119655
FLXAL-150S	1-1/2"	190	38.10	40.01	46.99	49.53	164.5	1000	837654119662
FLXAL-200S	2"	255	50.80	52.83	59.69	62.23	225.5	1000	837654119679

## ELECTRICAL CONDUIT AND WIRES



400 MARTIN LUTHER KING JR WAY, BRIDGETON, NJ 08302  
PHONE : (718).338.1851 FAX : (718).228.1851  
orders@ammoelectric.com

www.ammoelectric.com