



CATEGORY
**ELECTRICAL
CONDUIT & WIRES**

AMMO ITEM #

FSC
50-400

Company: _____
Job: _____ #Item: _____
Notes: _____

Flexible Steel Conduit

Used to provide protection from damage to electrical cables and other equipment

FEATURES

Excelent flexibility, crushing resistance.

APPLICATIONS

Protect cable and wire on transportation system engineering / auto-control equipment / transmission and distribution system / communication system / ship / mansion / plant / outdoors

MATERIALS

- Galvanized steel
- Aluminium

TEMPERATURE RANGE

-40°C~+350°C

IP RATING


IP 40

FLEXIBILITY

High

RoHS COMPLIANCE

Yes

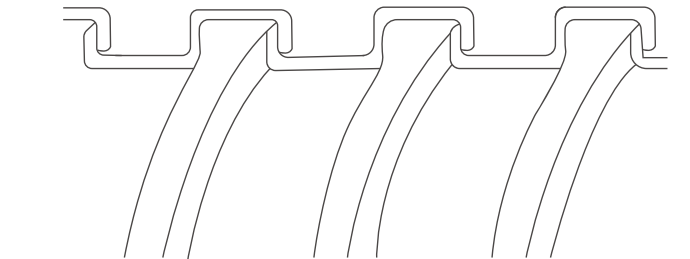

AMMO#	SIZE	ID (mm)	OD (mm)	BENDING RADIUS	LENGTH OF ROLL	WEIGHT	UPC
		MIN	MIN	(mm)	(m)	(kg / Coil)	
FSC-50	1/2"	9.50	15.60	51	100	7	837654107003
FSC-75	3/4"	15.80	23.40	76	100	8.8	837654107010
FSC-100	1"	20.60	28.10	101	100	10.7	837654107027
FSC-125	1-1/4"	25.40	35.10	127	100	8.4	837654107034
FSC-150	1-1/2"	31.80	41.40	165	50	10.1	837654107041
FSC-200	2"	38.10	49.53	190	50	12	837654107058
FSC-250	2-1/2"	50.80	62.23	254	50	8.7	837654107065
FSC-300	3"	63.50	77.72	318	25	10.5	837654107072
FSC-350	3-1/2"	76.20	90.42	381	25	0	837654107089
FSC-400	4"	101.60	115.82	508	25	15.8	837654107096

ELECTRICAL CONDUIT AND WIRES



400 MARTIN LUTHER KING JR WAY, BRIDGETON, NJ 08302
PHONE : (718).338.1851 FAX : (718).228.1851
orders@ammoelectric.com

www.ammoelectric.com