



CATEGORY
**ELECTRICAL
 CONDUIT & WIRES**
 AMMO ITEM #
FSC 50UL-40UL

Company: _____
 Job: _____ #Item: _____
 Notes: _____

Flexible Steel Conduit



Used to provide protection from damage to electrical cables and other equipment

FEATURES

Galvanized Steel Flexible Conduit PRWG series is UL listed / recognized for full trade size. The performances of flexibility, pull and impact resistance completely meet with UL1 standard.

APPLICATIONS

Wiring protection in/on building, office, light fixture, machines, elevator, data center and etc. where demand UL listed and low fire hazard. The Extra Reduced Wall type is especially used for office OA system or above ceiling.

MATERIAL

Galvanized steel (Reduced Wall)

TEMPERATURE RANGE

50°C~+350°C

IP RATING

IP 40

FLEXIBILITY


High

RoHS COMPLIANCE

Yes

CERTIFICATE

UL (File No.: E490001)

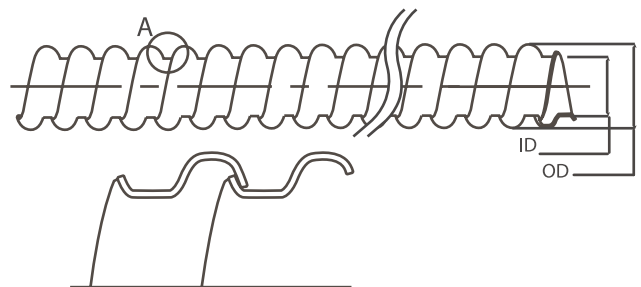

DETAIL A

AMMO#	SIZE	ID (mm)		OD (mm)		PACKAG ROLL (ft/m)	MEASUREMENT (LxWxH mm)	WEIGHT (kg / Coil)	UPC
		MIN	MAX	MIN	MAX				
FSC-50UL	1/2"	15.88	16.38	21.84	23.37	100/30.5	380*380*150	10.7	837654071915
FSC-75UL	3/4"	20.62	21.21	26.54	28.07	100/30.5	450*450*180	15	837654071960
FSC-100UL	1"	25.40	26.42	33.02	35.05	100/30.5	550*550*220	26	837654071892
FSC-125UL	1-1/4"	31.75	33.02	39.37	41.4	50/15.3	500*500*180	16	837654071908
FSC-150UL	1-1/2"	38.10	40.01	46.99	49.53	50/15.3	580*580*200	18.5	837654071922
FSC-200UL	2"	50.80	52.83	59.69	62.23	25/7.6	550*550*200	24.5	837654071939
FSC-250UL	2-1/2"	63.5	-	72.64	77.72	25/7.6	700*700*200	16	837654071946
FSC-300UL	3"	76.2	-	85.34	90.42	25/7.6	750*750*250	20.5	837654071953
FSC-350UL	3-1/2"	88.9	-	98.04	103.12	25/7.6	900*900*300	26.9	837654089095
FSC-400UL	4"	101.6	-	110.74	115.82	25/7.6	900*900*300	30.5	837654085486

ELECTRICAL CONDUIT AND WIRES



400 MARTIN LUTHER KING JR WAY, BRIDGETON, NJ 08302
 PHONE : (718).338.1851 FAX : (718).228.1851
 orders@ammoelectric.com

www.ammoelectric.com