



CATEGORY
**ELECTRICAL
CONDUIT & WIRES**

AMMO ITEM #

LTM

Company: _____
Job: _____ #Item: _____
Notes: _____

Flexible Steel Conduit



Used in conjunction with liquid-tight fittings, conduit can keep moisture at bay

APPLICATIONS

Protect cable and wire on transportation system engineering / auto-control equipment / transmission and distribution system / communication system / ship / mansion / plant / outdoors

FEATURES

Excelent waterproof, high flexibility, good insulativity, crushing resistance, corrosion resistant, sunlight resistant

MATERIAL

Galvanized steel core, PVC jacketed, interlock type

FLEXIBILITY


Medium

TEMPERATURE RANGE

-10°C~+70°C, -20°C~+90°C,
-20°C~+105°C, -40°C~+120°C

JACKET COLOR

Grey (Standard)

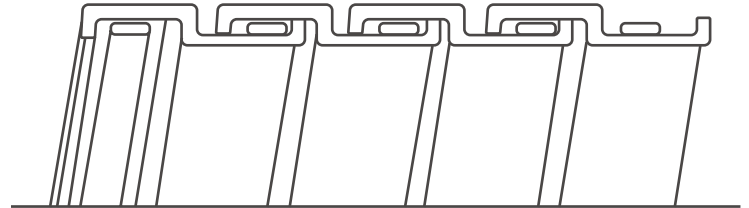

AMMO#	SIZE	ID (mm)		OD (mm)		BENDING RADIUS (mm)	WEIGHT (kg / coil)	PKG FT	UPC
		MIN	MAX	MIN	MAX	MIN			
LTM-50	1/2"	15.80	16.30	20.80	21.30	85	11.3	100	837654106907
LTM-75	3/4"	20.70	21.20	26.30	216.70	100	13.3	100	837654106914
LTM-100	1"	26.20	26.80	32.70	33.40	150	16.3	100	837654106921
LTM-125	1-1/4"	34.80	35.40	41.40	42.20	180	11.3	50	837654106938
LTM-150	1-1/2"	40.10	40.60	47.40	48.30	220	17.3	50	837654106945
LTM-200	2"	51.30	51.90	59.40	60.30	250	23.6	50	837654106952
LTM-250	2-1/2"	63.00	63.60	72.10	73.00	300	19	25	837654106969
LTM-300	3"	78.00	78.70	87.90	88.90	450	21.6	25	837654106976
LTM-350	3-1/2"	88.90	89.92	100.6	101.6	518	28.00	25	837654106983
LTM-400	4"	101.60	102.60	113.20	114.30	600	31.9	25	837654106990

ELECTRICAL CONDUIT AND WIRES



400 MARTIN LUTHER KING JR WAY, BRIDGETON, NJ 08302
PHONE : (718).338.1851 FAX : (718).228.1851
orders@ammoelectric.com

www.ammoelectric.com