



CATEGORY

WIRING  
DEVICES

AMMO ITEM #

TR-15WH-ST-RB

Company: \_\_\_\_\_

Job: \_\_\_\_\_ #Item: \_\_\_\_\_

Notes: \_\_\_\_\_

# Self-Test GFCI Tamper Resistant, Red & Blue




## APPLICATIONS

- Residential  
Bathrooms \ Kitchens \ Basements \ Garages \ Laundry rooms \ Wet locations
- Social institution  
School class rooms \ Laboratories \ Restrooms and Kitchens \ Airports \ Commercial offices \ Shopping centers \ Restaurants \ Hotels \ Public bathrooms
- Public Areas receptacle which near wet or damp locations

## FEATURES

- Self-Test  
The GFCI Outlet self-test automatically every 15 minutes to ensure reliable protection from shock due to ground fault occurrences
- Tamper-Resistant  
Helps keep children safe  
Helps prevent insertion of foreign objects  
Children insert objects into the socket such as screw driver, knife or copper wire can not make the TR shutter open, unless the plug insert into with both pins  
Complies with NEC® requirement mandating that all 15A and 20A receptacles installed in dwelling units be listed as tamper-resistant shutter mechanism inside the receptacle blocks access to the contacts unless a two or three prong plug is inserted
- Green light  
Cyclic testing every 15 minutes  
GFCI working properly
- Red light  
Blinking: GFCI Self-Testing  
On ALERT!: GFCI reached its service life and needs to be replaced
- Led Off  
Check the power circuit if can not reset  
GFCI tripped, press RESET button

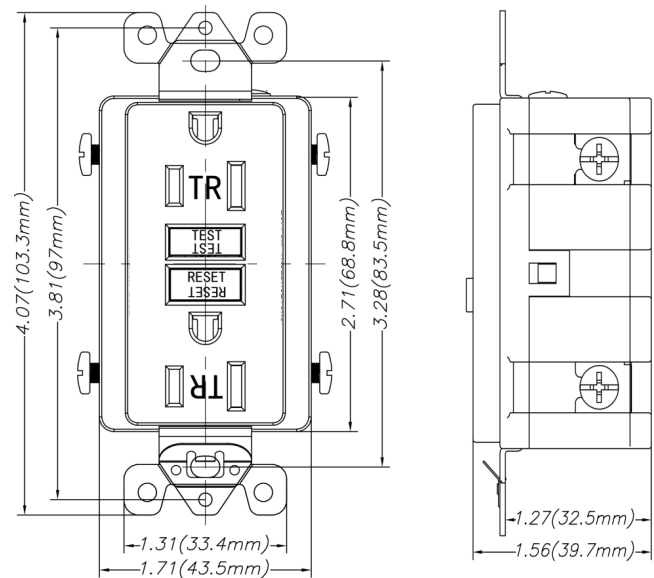

## MATERIAL

- 0.8mm thick high-precision phosphorus bronze
- 1.2mm thick galvanized steel bracket
- Silver alloy contacts with 30 silver layer thick
- Coated PC board with Smart chip MCU to protect critical components from moisture

## WIRING & DEVICES



400 MARTIN LUTHER KING JR WAY, BRIDGETON, NJ 08302  
PHONE : (718).338.1851 FAX : (718).228.1851  
orders@ammoelectric.com

www.ammoelectric.com





CATEGORY

WIRING  
DEVICES

AMMO ITEM #

TR-15WH-ST-RB

# Self-Test GFCI Tamper Resistant, Red & Blue

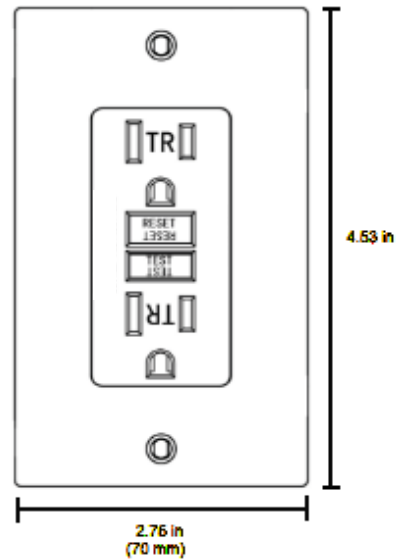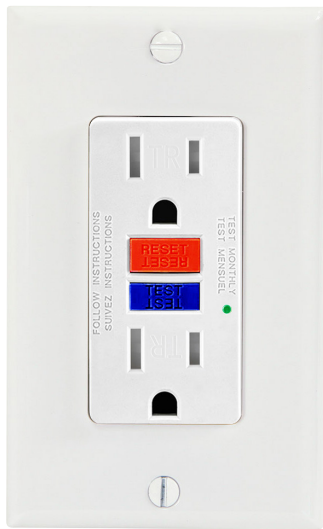

## GENERAL INFORMATION

- Height: \_\_\_\_\_ 4.07 in
- Legth: \_\_\_\_\_ 1.56 in
- Width: \_\_\_\_\_ 1.71 in
- Trip Level: \_\_\_\_\_ 4~6 mA
- Trip Time: \_\_\_\_\_ < 025 Seconds
- Frequency: \_\_\_\_\_ 60 Hz
- Max Interruption: \_\_\_\_\_ 10,000 A
- Working Voltage: \_\_\_\_\_ 102V ~ 132V
- Rating Voltage: \_\_\_\_\_ 125V
- Amperange Rating: \_\_\_\_\_ 15A
- NEMA: \_\_\_\_\_ 5-15R
- Wires: \_\_\_\_\_ 3
- Poles: \_\_\_\_\_ 2
- Wiring method: \_\_\_\_\_ Back & Side Wire, grounding
- Self Grounding: \_\_\_\_\_ Yes
- Tamper - Resistant: \_\_\_\_\_ Yes

## CERTIFICATIONS

- UL Listed
- CSA Certified
- NOM Certified

## MATERIAL CHARACTERISTICS

- Face: \_\_\_\_\_ thermoplastic
- Body: \_\_\_\_\_ thermoplastic
- Operating temperature: \_\_\_\_\_ -35°C to 66°C
- Environmental: \_\_\_\_\_ flammability UL-94 V2 Rating
- Max. humidity: \_\_\_\_\_ 95%

## PACKAGING

- PKG: \_\_\_\_\_ 50
- Weight: \_\_\_\_\_ 122 g
- UPC Number: \_\_\_\_\_ 837654089729

## WIRING & DEVICES



400 MARTIN LUTHER KING JR WAY, BRIDGETON, NJ 08302  
 PHONE : (718).338.1851 FAX : (718).228.1851  
 orders@ammoelectric.com

www.ammoelectric.com