



CATEGORY

WIRING  
DEVICES

AMMO ITEM #

TR-USBXX-WH

Company: \_\_\_\_\_

Job: \_\_\_\_\_ #Item: \_\_\_\_\_

Notes: \_\_\_\_\_

# Dual Tamper Resistant USB Receptacle



## APPLICATION

- Indoor public areas, hotels, airports, residential

## FEATURES

- Dual Functionality: features two standard outlets and two USB ports to charge multiple devices
- Convenient & Fast Charging: plug USB devices directly into the outlet—no charger needed
- Smart Chip Technology: detects the connected device and optimizes the charging requirements to ensure a powerful fast charge
- Tamper-Resistant: enhances safety by preventing insertion of foreign objects
- Built-In Protection: includes overload and short circuit protection for added safety
- Fits in a standard wall box, is compatible with standard wall plates and can be multi-ganged with other devices. Wall plate included for finish look

## MATERIAL

- Face: Thermoplastic
- Body: Thermoplastic
- 0.8 mm thick high-precision phosphorus bronze
- 1.2 mm thick galvanized steel bracket
- Silver alloy contacts with 30 silver layer thick
- Coated PC board with Smart chip MCU to protect critical components from moisture
- Environmental: Flammability UL-94 V2 Rating

## CERTIFICATIONS

- cULus
- UL 498&CSA C22.2 No. 42-10



TR-USB15-WH



TR-USB20-WH

AMMO#	USB TYPE	USB RATING	USB PORT MAX	WARRANTY	NEMA	WEIGHT (g)	PKG	UPC
TR-USB15-WH	Type A + Type A	5V 4.0A 20W	2.0A	1 year	5-15R	158	50	837654114575
TR-USB20-WH	Type A + Type A	5V 4.0A 20W	2.0A	1 year	5-20R	158	50	837654114711

## WIRING & DEVICES



1000 COMMERCE CENTER DR ELKTON MD 21921  
PHONE : (718).338.1851 FAX : (718).228.1851  
orders@ammoelectric.com

www.ammoelectric.com





CATEGORY

WIRING  
DEVICES

AMMO ITEM #

TR-USBXX-WH

## Dual Tamper Resistant USB Receptacle

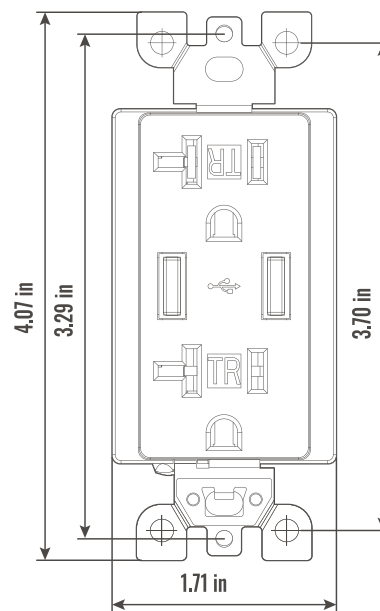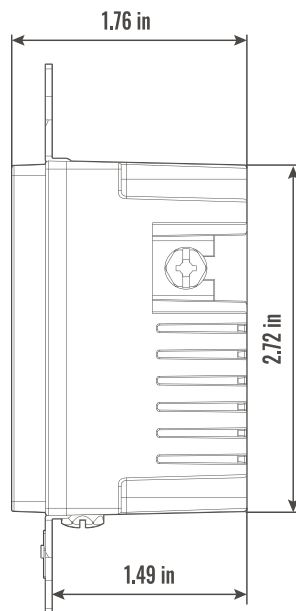

### ELECTRICAL SPECIFICATION

- Voltage: \_\_\_\_\_ 125V, 60 Hz
- Receptacle: \_\_\_\_\_ Type A/A Duplex receptacle
- USB Rating: \_\_\_\_\_ 5VDC

### CONSTRUCTION SPECIFICATIONS

- Body: \_\_\_\_\_ Thermoplastic
- Strap: \_\_\_\_\_ Steel
- Flame rating: \_\_\_\_\_ UL-94 V2
- Color: \_\_\_\_\_ White
- Style: \_\_\_\_\_ Decorator
- Faceplate: \_\_\_\_\_ Included
- Termination: \_\_\_\_\_ Back & Side
- Tamper Resistant: \_\_\_\_\_ Yes
- Country of Origin: \_\_\_\_\_ China

### MECHANICAL SPECIFICATIONS

- Terminal: \_\_\_\_\_ 14-12 AWG
- Torque Range: \_\_\_\_\_ 14-18 in-lbs
- Operating Temperature: \_\_\_\_\_ -10 °C to 40 °C
- Weather Resistant: \_\_\_\_\_ No

### FCC STATEMENT

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

**WARNING:** This product can expose you to chemicals including lead which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

## WIRING & DEVICES



1000 COMMERCE CENTER DR ELKTON MD 21921  
PHONE : (718).338.1851 FAX : (718).228.1851  
[orders@ammoelectric.com](mailto:orders@ammoelectric.com)

[www.ammoelectric.com](http://www.ammoelectric.com)