



CATEGORY
**WIRING &
 DEVICES**

AMMO ITEM #
TRWR-1-W-ST

Company: _____
 Job: _____ #Item: _____
 Notes: _____




Self-Test GFCI Outlet

APPLICATIONS

- Residential:
 Bathrooms\ Kitchens\ Basements\ Garages\ Laundry rooms\ Wet locations
- Social institution:
 School class rooms\ Laboratories\ Restrooms and Kitchens
 Airports\ Commercial Offices\ Shopping centers
 Restaurants\ Hotels\ Public bathrooms
 Public Areas receptacle which near wet or damp locations.

PRODUCT FEATURES

- Self-Test
 The GFCI Outlet self-test automatically every 15 minutes to ensure reliable protection from shock due to ground fault occurrences.
- Tamper-Resistant
 Helps keep children safe.
 Helps prevent insertion of foreign objects.
 Children insert objects into the socket such as screw driver, knife or copper wire can not make the TR shutter open, unless the plug insert into with both pins.
 Complies with NEC® requirement mandating that all 15A and 20A receptacles installed in dwelling units be listed as tamper-resistant Shutter mechanism inside the receptacle blocks access to the contacts unless a two- or three-prong plug is inserted.
- Status Indicator Light
 Green Led-Normal Operation:
 GFCI working properly Providing power.
- Red Led- Alert:
 -Blinking: Initial Self-Test upon first power up(Normal)
 -Solid or Blinking: Press TEST and RESET buttons to Reset GFCI
 -If GFCI will not Reset or Solid or Blinking red continues replace GFCI
- No Led- OFF (No Power):
 -GFCI in tripped state
 -Press RESET button
 -If GFCI can not reset, check Power on the circuit
 -Replace the GFCI

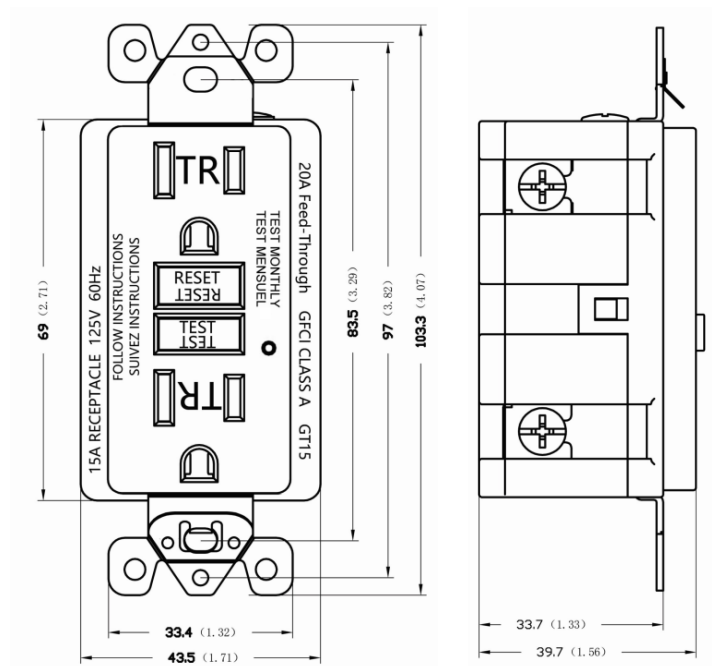

WIRING & DEVICES



400 MARTIN LUTHER KING JR WAY, BRIDGETON, NJ 08302
 PHONE : (718).338.1851 FAX : (718).228.1851
 orders@ammoelectric.com

www.ammoelectric.com



CATEGORY

WIRING & DEVICES


AMMO ITEM #

TRWR-1-W-ST

Company: _____

Job: _____ #Item: _____

Notes: _____

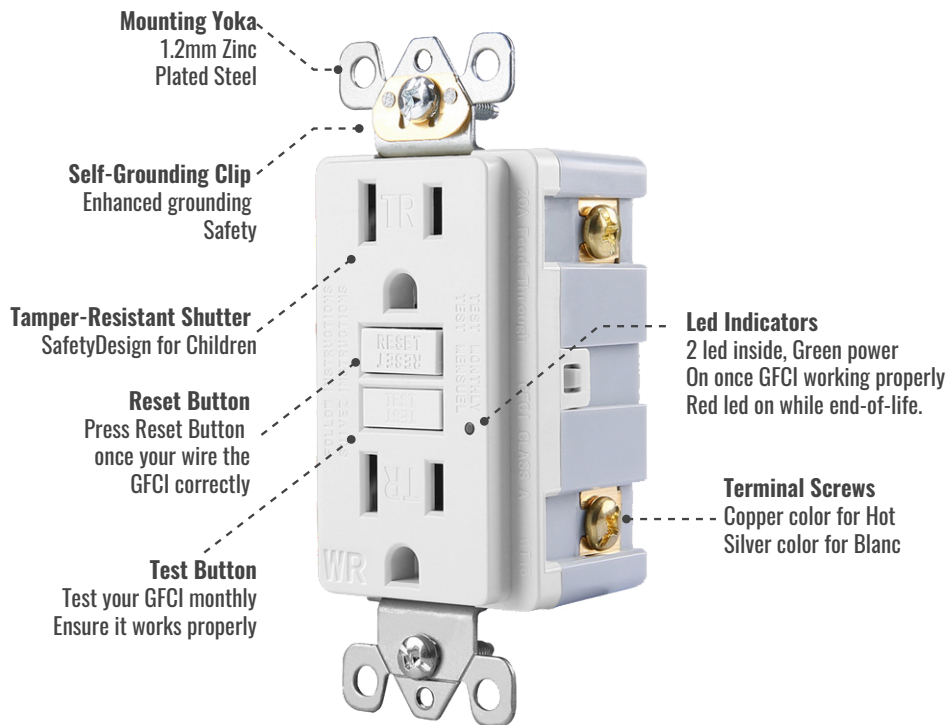

GENERAL PRODUCT INFORMATION

- UL File No: _____ E504391
- UL Standard: _____ UL498 & UL943 5th Edition latest 2018 Version
- Trip Lever: _____ 4~6mA < 25mS
- Rating: _____ 15Amp 125V AC
- NEMA: _____ 5-15R
- Color: _____ White
- Self Grounding: _____ Yes
- Wire Type: _____ Back & Side Wire
- Tamper-Resistant: _____ Yes
- Weather-Resistant: _____ Yes
- Meet 2017 NEC Code Requirements
- Weight: _____ 0.16 Kg

MATERIAL CHARACTERISTICS

- Environmental: _____ Flammability UL-94 V2 Rating
- Operating Temperature: _____ -35°C to 66°C
- Material: _____ Face, Thermoplastic; Body, Thermoplastic
- Bracket: _____ 1.2mm Zinc-Plated thickness

PACKAGING

- PKG: _____ 50
- Ctn Weight: _____ 0.176 Kg
- UPC Number: _____ 837654083710

WIRING & DEVICES



400 MARTIN LUTHER KING JR WAY, BRIDGETON, NJ 08302
 PHONE : (718).338.1851 FAX : (718).228.1851
 orders@ammoelectric.com

www.ammoelectric.com