



Company: \_\_\_\_\_

Job: \_\_\_\_\_ #Item: \_\_\_\_\_

Notes: \_\_\_\_\_

# Self-Test GFCI Outlet





## APPLICATIONS

- Residential:  
Bathrooms\ Kitchens\ Basements\ Garages\ Laundry rooms\ Wet locations
- Social institution:  
School class rooms\ Laboratories\ Restrooms and Kitchens  
Airports\ Commercial Offices\ Shopping centers  
Restaurants\ Hotels\ Public bathrooms  
Public Areas receptacle which near wet or damp locations.

## PRODUCT FEATURES

- Self-Test  
The GFCI Outlet self-test automatically every 15 minutes to ensure reliable protection from shock due to ground fault occurrences.
- Tamper-Resistant  
Helps keep children safe.  
Helps prevent insertion of foreign objects.  
Children insert objects into the socket such as screw driver, knife or copper wire can not make the TR shutter open, unless the plug insert into with both pins.  
Complies with NEC® requirement mandating that all 15A and 20A receptacles installed in dwelling units be listed as tamper-resistant Shutter mechanism inside the receptacle blocks access to the contacts unless a two- or three-prong plug is inserted.
- Status Indicator Light  
Green Led-Normal Operation:  
GFCI working properly Providing power.
- Red Led- Alert:  
-Blinking: Initial Self-Test upon first power up(Normal)  
-Solid or Blinking: Press TEST and RESET buttons to Reset GFCI  
-If GFCI will not Reset or Solid or Blinking red continues replace GFCI
- No Led- OFF (No Power):  
-GFCI in tripped state  
-Press RESET button  
-If GFCI can not reset, check Power on the circuit  
-Replace the GFCI

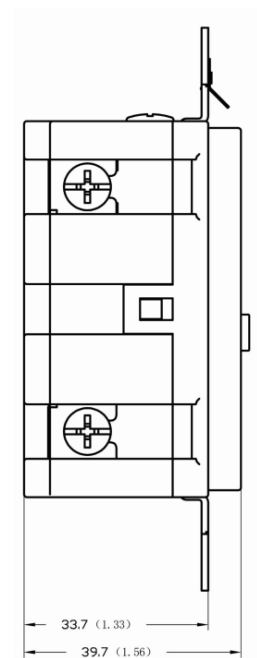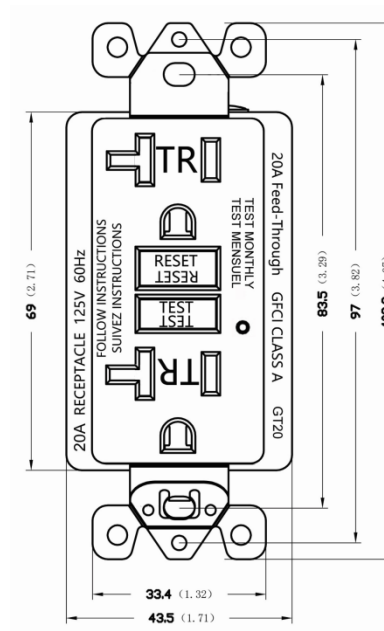

## WIRING & DEVICES



CATEGORY

WIRING &  
DEVICES


AMMO ITEM #

TRWR-2-IV-ST

Company: \_\_\_\_\_

Job: \_\_\_\_\_ #Item: \_\_\_\_\_

Notes: \_\_\_\_\_

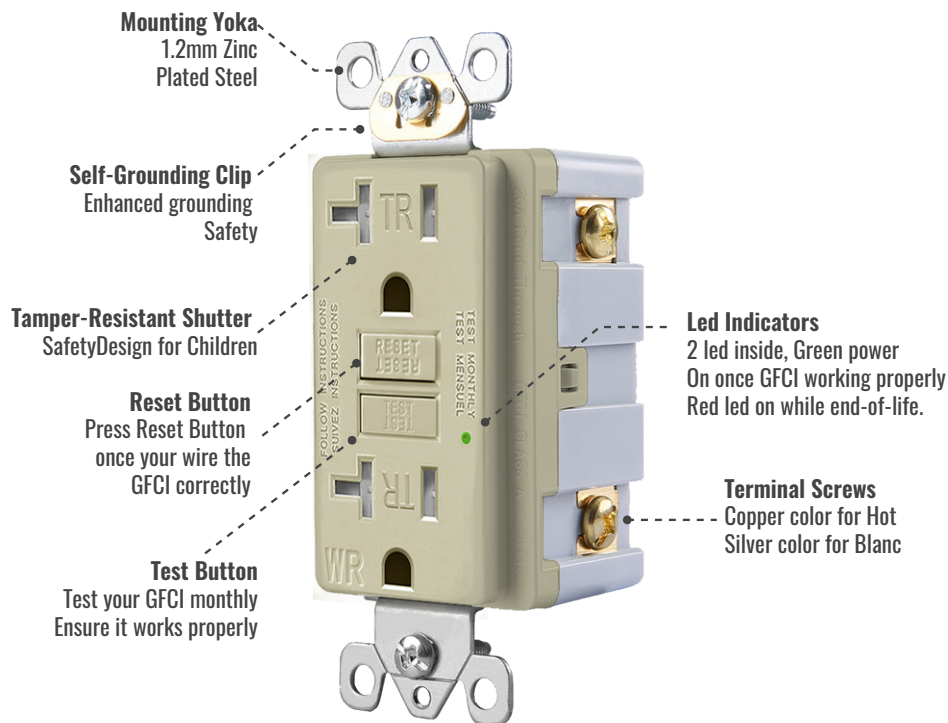

### GENERAL PRODUCT INFORMATION

- UL File No: \_\_\_\_\_ E504391
- UL Standard: \_\_\_\_\_ UL498 & UL9  
2018 Version
- Trip Lever: \_\_\_\_\_ 4~6mA < 25mS
- Rating: \_\_\_\_\_ 20Amp 125V AC
- NEMA: \_\_\_\_\_ 5-20R
- Color: \_\_\_\_\_ Ivory
- Self Grounding: \_\_\_\_\_ Yes
- Wire Type: \_\_\_\_\_ Back & Side Wire
- Tamper-Resistant: \_\_\_\_\_ Yes
- Weather-Resistant: \_\_\_\_\_ Yes
- Meet 2017 NEC Code Requirements
- Weight: \_\_\_\_\_ 0.16 Kg

### MATERIAL CHARACTERISTICS

- Environmental: \_\_\_\_\_ Flammability UL-94 V2 Rating
- Operating Temperature: \_\_\_\_\_ -35°C to 66°C
- Material: \_\_\_\_\_ Face, Thermoplastic; Body, Thermoplastic
- Bracket: \_\_\_\_\_ 1.2mm Zinc-Plated thickness

### PACKAGING

- PKG: \_\_\_\_\_ 50
- Ctn Weight: \_\_\_\_\_ 0.176 Kg
- UPC Number: \_\_\_\_\_ 837654083727

## WIRING & DEVICES



400 MARTIN LUTHER KING JR WAY, BRIDGETON, NJ 08302  
PHONE : (718).338.1851 FAX : (718).228.1851  
orders@ammoelectric.com

www.ammoelectric.com