



CATEGORY
LIGHTING & ACCESSORIES
 AMMO ITEM #
ARLECD2GW

Company: _____
 Job: _____ #Item: _____
 Notes: _____

Ultra Slim LED Exit Sign




FEATURES

- Injection-molded thermoplastic ABS housing, UL 94V-0 flame rating
- Innovative, easy installation in minutes
- Letters 6" height with 3/4" stroke
- SALIDA faceplate available
- Single or double face (universal)
- Universal J-box mounting pattern
- 120V-277VAC Dual voltage operation
- Ultra bright **GREEN LEDs**
- Built-in 3.6V1000mAh Ni-MH battery for minimum 90 minutes emergency operation
- Maximum 24 hours for full recharge time
- Test switch and charge indicator
- UL and cULus listed
- 0° to 40° C indoor damp location listed

MEASUREMENTS

- The Ac Voltage: _____ 120-277V / 60hz
- Input Power: _____ 2w
- Ac Charging Current: _____ 32mA
- Luminous Flux (Ac): _____ 5Lm
- Color Temperature (Ac): _____ 1001k
- Luminous Flux (Dc): _____ 100lm
- Color Temperature (Dc): _____ 50000k

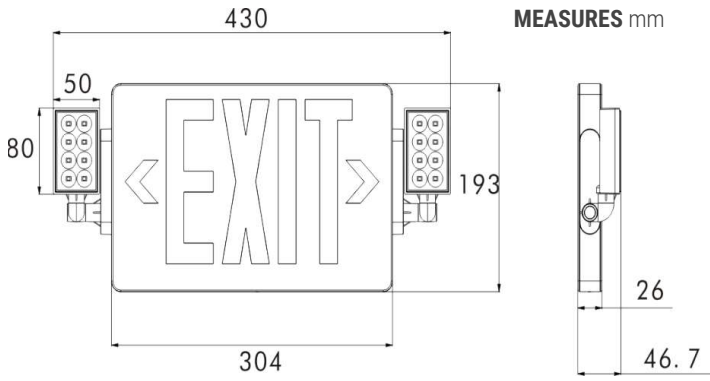

AMMO#	CHARGING TIME	EMERGENCY RUN TIME	LED TYPE	INPUT WATT	INPUT CURRENT	WEIGHT (g)	PKG	UPC
ARLECD2GW	24 h	90mins	8 Pcs green LEDs	3.3W	0.032A	1000	6	837654090879

LIGHTING & ACCESSORIES



400 MARTIN LUTHER KING JR WAY, BRIDGETON, NJ 08302
 PHONE : (718).338.1851 FAX : (718).228.1851
 orders@ammoelectric.com

www.ammoelectric.com