



CATEGORY
**LIGHTING &
 ACCESSORIES**

AMMO ITEM #

ARLEU9L

Company: _____
 Job: _____ #Item: _____
 Notes: _____

Dual Head Emergency Light





FEATURES

- Injection-molded thermoplastic ABS housing,UL 94V-0 flame rating
- Innovative,easy installation in minutes
- Suitable for wall mount applications
- Universal J-box mounting pattern
- 120V/277VAC Dual voltage operation
- Low profile 2x8pcs ultra bright 2835 SMT LED lamp for emergency mode
- Built-in 3.6V 600mAh Nickel cadmium battery for minimum 90 minutes emergency operation
- Maximum 24 hours for full recharge time
- Test switch and charge indicator
- UL and cULus listed
- 0° C to 40° C indoor damp location listed
- Five years warranty for the electrical parts and housing
- Three years warranty for battery
- Meets NFPA101 (Life Safety Code), NFPA 70 NEC, OSHA illumination standard

PACKAGING

- PKG: _____ 4
- Weight: _____ 750 g
- UPC Number: _____ 837654090831

DIMENSIONS	
AMMO ITEM	ARLEU9L
Voltage	120V/277V / 60Hz
Input power	2.4 W
Battery	3.6V 600mAh Nickel cadmium
LED.....	2x8pcs 2835 SMT
Discharge time	90mins
Luminous flux	150 lm
Color temperature	6000K-6500K
Packing info	41*33*24cm 6pcs/CTN 4.8/4.0kgs

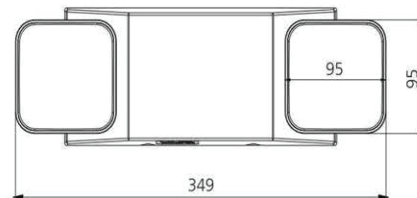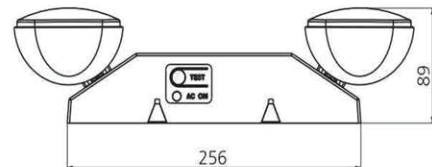

LIGHTING & ACCESSORIES



400 MARTIN LUTHER KING JR WAY, BRIDGETON, NJ 08302
 PHONE : (718).338.1851 FAX : (718).228.1851
 orders@ammoelectric.com

www.ammoelectric.com