



CATEGORY

SPRING STEEL
FASTENERS

AMMO ITEM #

A-M-SM

Company: _____

Job: _____ #Item: _____

Notes: _____

H-MSM Conduit / Pipe To Flange Clip



APPLICATION

- Conduit flange mount clips support EMT and rigid conduit from beams
- Equipped with a rotatable joint, the conduit clip rotates 360° to position conduit in different directions

FEATURES


- Requires only a hammer to install
- Supports conduit/pipe or cable from beam flanges
- Snap close clip pivots a full 360°

MATERIALS

- Body: Spring Steel
- Covers: Geomet

CERTIFICATION

UL Standard: UL 2239

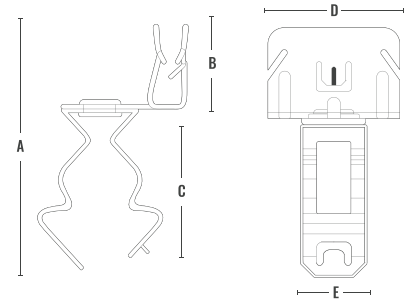

AMMO#	SIZE	A (in)	B (in)	C (in)	D (in)	E (in)	WEIGHT (g)	PKG	UPC
A6M912SM	9/16"-3/4"	2.56	.866	1.68	1.26	.63	39.10	100	837654115794
A6M58SM	5/16"-1/2"	2.56	.866	1.68	1.26	.63	29.55	100	837654115817
A6M24SM	1/8"-1/4"	2.56	.866	1.68	1.26	.63	27.30	100	837654115831
A812M912SM	9/16"-3/4"	2.92	.866	2.05	1.26	.63	34.10	100	837654115695
A812M58SM	5/16"-1/2"	2.92	.866	2.05	1.26	.63	32.00	100	837654115718
A812M24SM	1/8"-1/4"	2.94	.866	2.05	1.26	.63	30.00	100	837654115732
A16M912SM	9/16"-3/4"	3.39	.866	2.52	1.26	.63	39.00	100	837654116234
A16M58SM	5/16"-1/2"	3.41	.886	2.52	1.26	.63	37.20	100	837654116258
A16M24SM	1/8"-1/4"	3.41	.886	2.52	1.26	.63	34.90	100	837654116272
A20M912SM	9/16"-3/4"	3.83	.886	2.96	1.26	.63	43.10	100	837654116104
A20M58SM	5/16"-1/2"	3.83	.886	2.96	1.26	.63	40.90	100	837654116128
A20M24SM	1/8"-1/4"	3.83	.886	2.96	1.26	.63	38.70	100	837654116142
A24M912SM	9/16"-3/4"	4.07	.886	3.18	1.26	.63	47.95	100	837654116036
A24M58SM	5/16"-1/2"	4.07	.886	3.18	1.26	.63	43.40	100	837654116050
A24M24SM	1/8"-1/4"	4.07	.886	3.18	1.26	.63	41.40	100	837654116074
A32M912SM	9/16"-3/4"	4.77	.866	3.88	1.26	.63	51.00	100	837654115961
A32M58SM	5/16"-1/2"	4.77	.866	3.88	1.26	.63	49.00	100	837654115985
A32M24SM	1/8"-1/4"	4.77	.866	3.88	1.26	.63	46.60	100	837654116005

SPRING STEEL FASTENERS



Ammo Electric Inc.

1000 COMMERCE CENTER DR ELKTON MD 21921

PHONE : (718).338.1851 FAX : (718).228.1851

orders@ammoelectric.com

www.ammoelectric.com