



CATEGORY
**ELECTRICAL
CONDUIT**

AMMO ITEM #

LTM-UL-RL

Company: _____

Job: _____ #Item: _____

Notes: _____

Flexible Liquid Tight Metallic Conduit EF PVC Jacket, Steel, Reel



APPLICATION

- Suitable for places where UL certification is required for wire wiring, including general commercial buildings, industrial plants, power plants, shipyards, ships, computer rooms, etc, or directly buried underground to protect circuits below 600 V
- Use separate grounding conductor on circuits rated over 20a

MATERIAL



- Hose material: _____ Galvanized steel + copper wire
- Coating material: _____ PVC

CONFIGURATION

- Dry / Wet: _____ 60 °C
- Oil Res: _____ Yes
- IP Rating: _____ IP66

CERTIFICATION

- ROHS
- UL listed

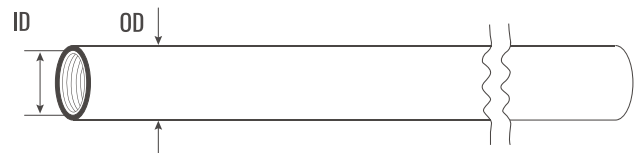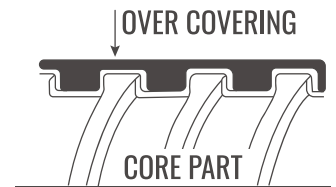

AMMO#	SIZE	CUT LENGT (L)	ID (mm)		OD (mm)		WEIGHT (kg / Pcs)	PKG COIL	UPC
			MIN	MAX	MIN	MAX			
LTM-38UL-RL	3/8"	304.8	12.29	12.80	17.50	18.00	110	1000	837654125724
LTM-50UL-RL	1/2"	304.8	15.80	16.31	20.80	21.30	144.5	1000	837654125731
LTM-75UL-RL	3/4"	152.4	20.83	21.34	25.20	26.70	101	500	837654125748
LTM-100UL-RL	1"	122	26.44	27.08	32.80	33.40	111	400	837654125755

ELECTRICAL CONDUIT



1000 COMMERCE CENTER DR ELKTON MD 21921
PHONE : (718).338.1851 FAX : (718).228.1851
orders@ammoelectric.com

www.ammoelectric.com