



CATEGORY  
**LIGHTING & ACCESSORIES**  
 AMMO ITEM #  
**ARLECD2RW**

Company: \_\_\_\_\_  
 Job: \_\_\_\_\_ #Item: \_\_\_\_\_  
 Notes: \_\_\_\_\_

# Ultra Slim LED Exit Sign




**FEATURES**

- Injection-molded thermoplastic ABS housing, UL 94V-0 flame rating
- Innovative, easy installation in minutes
- Letters 6" height with 3/4" stroke
- SALIDA faceplate available
- Single or double face (universal)
- Universal J-box mounting pattern
- 120V-277VAC Dual voltage operation
- Ultra bright **RED LEDs**
- Built-in 3.6V1000mAh Ni-MH battery for minimum 90 minutes emergency operation
- Maximum 24 hours for full recharge time
- Test switch and charge indicator
- UL and cULus listed
- 0° to 40° C indoor damp location listed

**MEASUREMENTS**

- The Ac Voltage: \_\_\_\_\_ 120-277V / 60hz
- Input Power: \_\_\_\_\_ 2w
- Ac Charging Current: \_\_\_\_\_ 32mA
- Luminous Flux (Ac): \_\_\_\_\_ 5Lm
- Color Temperature (Ac): \_\_\_\_\_ 1001k
- Luminous Flux (Dc): \_\_\_\_\_ 100lm
- Color Temperature (Dc): \_\_\_\_\_ 50000k

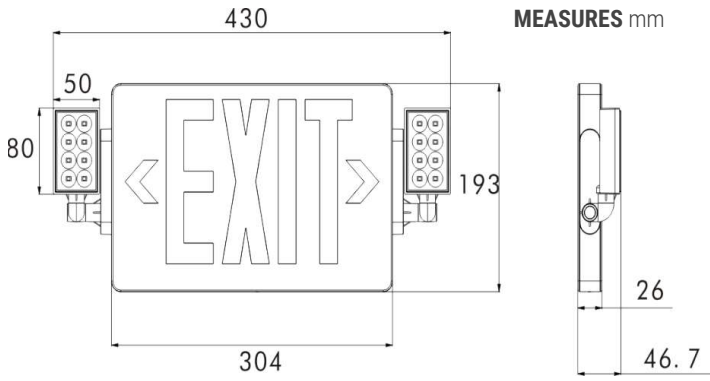

AMMO#	CHARGING TIME	EMERGENCY RUN TIME	LED TYPE	INPUT WATT	INPUT CURRENT	WEIGHT (g)	PKG	UPC
ARLECD2RW	24 h	90mins	10 Pcs red LEDs	3.3W	0.032A	1000	6	837654090862

**LIGHTING & ACCESSORIES**



400 MARTIN LUTHER KING JR WAY, BRIDGETON, NJ 08302  
 PHONE : (718).338.1851 FAX : (718).228.1851  
 orders@ammoelectric.com

www.ammoelectric.com