



CATEGORY

GROUNDING

AMMO ITEM #

ARBARREL-L

Company: _____

Job: _____ #Item: _____

Notes: _____

Compression Lugs Splices Long Barrel



APPLICATIONS

- Suitable for use at voltages up to 35 KV provided connector is properly taped
- 5 KV is the maximum voltage in all bare splice applications
- Rated for copper conductors

FEATURES


- Color coded
- Tin-plated to provide corrosion resistance
- Seamless, high conductivity copper tubing, suitable for heavy duty applications

MATERIAL

E-Copper

FINISH

Tin plated

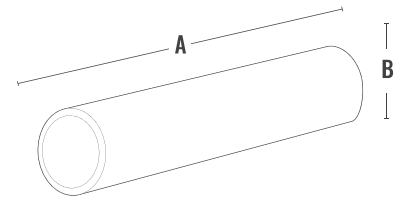

AMMO#	WIRE RANGE	COLOR CODE	A (in)	B (in)	WEIGHT (lb)	INNER	MASTER	UPC
ARBARREL-8L	#8	Red	0.0791	0.0068	0.019	100	1000	837654122822
ARBARREL-6L	#6	Blue	0.0929	0.008	0.019	100	1000	837654122839
ARBARREL-4L	#4	Grey	0.0929	0.0098	0.023	100	1000	837654122846
ARBARREL-2L	#2	Brown	0.1024	0.0124	0.036	50	500	837654122853
ARBARREL-10L	1/0	Pink	0.113	0.1535	0.063	25	250	837654122860
ARBARREL-20L	2/0	Black	0.1224	0.0174	0.067	25	250	837654122877
ARBARREL-30L	3/0	Orange	0.1224	0.0194	0.079	25	250	837654122884
ARBARREL-40L	4/0	Purple	0.1335	0.0215	0.117	25	250	837654122891
ARBARREL-250L	250 MCM	Yellow	0.1335	0.0234	0.167	15	105	837654122907
ARBARREL-300L	300 MCM	White	0.1626	0.0259	0.197	10	100	837654122914
ARBARREL-350L	350 MCM	Red	0.1626	0.0276	0.248	10	100	837654122921
ARBARREL-400L	400 MCM	Blue	0.172	0.0301	0.289	10	100	837654122938
ARBARREL-500L	500 MCM	Brown	0.1815	0.0329	0.447	5	50	837654122945
ARBARREL-600L	600 MCM	Green	0.2106	0.0364	0.609	5	50	837654122952
ARBARREL-750L	750 MCM	Black	0.2311	0.0406	0.755	5	50	837654122969

GROUNDING



Ammo Electric Inc.

1000 COMMERCE CENTER DR ELKTON MD 21921

PHONE : (718).338.1851 FAX : (718).228.1851

orders@ammoelectric.com

www.ammoelectric.com