



CATEGORY

GROUNDING

AMMO ITEM #

ARBARREL-S

Company: _____

Job: _____ #Item: _____

Notes: _____

Compression Lugs Splices Short Barrel



APPLICATIONS

- Suitable for use at voltages up to 35 KV provided connector is properly taped
- 5 KV is the maximum voltage in all bare splice applications
- Rated for copper conductors

FEATURES


- Color coded
- Tin-plated to provide corrosion resistance
- Seamless, high conductivity copper tubing, suitable for heavy duty applications

MATERIAL

E-Copper

FINISH

Tin plated

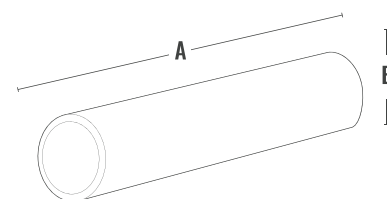

AMMO#	WIRE RANGE	COLOR CODE	A (in)	B (in)	WEIGHT (lb)	INNER	MASTER	UPC
ARBARREL-8S	#8	Red	0.0354	0.0067	0.010	100	1000	837654122679
ARBARREL-6S	#6	Blue	0.0394	0.0079	0.011	100	1000	837654122686
ARBARREL-4S	#4	Grey	0.0394	0.0098	0.013	100	1000	837654122693
ARBARREL-2S	#2	Brown	0.0492	0.0122	0.024	100	1000	837654122709
ARBARREL-1S	#1	Green	0.063	0.0154	0.040	50	500	837654122716
ARBARREL-10S	1/0	Pink	0.0689	0.0173	0.046	50	500	837654122723
ARBARREL-20S	2/0	Black	0.0689	0.0193	0.052	50	500	837654122730
ARBARREL-30S	3/0	Orange	0.0748	0.0217	0.062	50	500	837654122747
ARBARREL-40S	4/0	Purple	0.0787	0.0232	0.081	25	250	837654122754
ARBARREL-250S	250 MCM	Yellow	0.0827	0.026	0.103	25	250	837654122761
ARBARREL-350S	350 MCM	Red	0.0827	0.0276	0.139	20	200	837654122778
ARBARREL-400S	400 MCM	Blue	0.0906	0.0299	0.177	10	100	837654122785
ARBARREL-500S	500 MCM	Brown	0.0984	0.0327	0.263	10	100	837654122792
ARBARREL-600S	600 MCM	Green	0.0984	0.0366	0.338	5	50	837654122808
ARBARREL-750S	750 MCM	Black	0.1264	0.0406	0.509	5	50	837654122815

GROUNDING



1000 COMMERCE CENTER DR ELKTON MD 21921
PHONE : (718).338.1851 FAX : (718).228.1851
orders@ammoelectric.com

www.ammoelectric.com