



CATEGORY
**ELECTRICAL
FITTINGS**
AMMO ITEM #
ARGL

Company: _____

Job: _____ #Item: _____

Notes: _____

Grounding Locknuts



APPLICATION

Used in harsh vibration environments to fasten threaded conduit to opening in a box or enclosure

FEATURE


Can be sed in harsh vibration environments

MATERIAL

Zinc plated steel

CERTIFICATION

- UL-467&514B
- CAN / CSA-C22.2 18.3-04

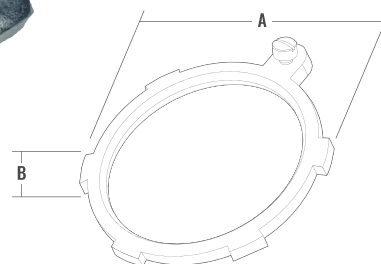

AMMO#	SIZE	A (in)	B (in)	WEIGHT (lb)	INNER	MASTER	UPC
ARGL-50	1/2"	1.14	0.17	0.024	100	1000	837654089996
ARGL-75	3/4"	1.39	0.18	0.032	100	1000	837654090008
ARGL-100	1"	1.73	0.24	0.041	50	500	837654090015
ARGL-125	1-1/4"	2.05	0.24	0.056	50	500	837654090022
ARGL-150	1-1/2"	2.4	0.25	0.059	25	250	837654090039
ARGL-200	2"	2.91	0.29	0.079	20	200	837654090046
ARGL-250	2-1/2"	3.46	0.29	0.101	-	50	837654090053
ARGL-300	3"	4.14	0.3	0.144	-	50	837654090060
ARGL-350	3-1/2"	4.69	0.3	0.170	-	25	837654090077
ARGL-400	4"	5.25	0.34	0.194	-	25	837654090084

ELECTRICAL FITTINGS



1000 COMMERCE CENTER DR ELKTON MD 21921
PHONE : (718).338.1851 FAX : (718).228.1851
orders@ammoelectric.com

www.ammoelectric.com