



CATEGORY
**ELECTRICAL
FITTINGS**

AMMO ITEM #

ARLTCN90-MI

Company: _____

Job: _____ #Item: _____

Notes: _____

90° Liquid Tight Connector Malleable Iron



APPLICATIONS

- To secure, ground and seal liquid-tight flexible metal conduit to boxes and enclosures
- Connects conduit and terminates bonding conductor run externally across liquid-tight conduit

FEATURES

- Tapered threaded male hub NPT
- Compact, slim diameter with small turning radius
- Furnished with an insulated throat with steel locknut and sealing ring
- Suitable for wet locations
- Long ferrule prevents pullout and tight bend conduit "pop-out"
- RoHS compliant

MATERIALS



- Malleable iron
- Steel locknut

CERTIFICATIONS

- UL Standards: 514B
- CUL Standard: C22.2 No.18.3-12
- Fed. Spec. W-F-408E
- NEMA: FB-1

FINISHES

- Malleable iron - electro zinc plated and chromate coated
- Steel - electro zinc plated and chromate coated
- PE, PP, Alum - natural

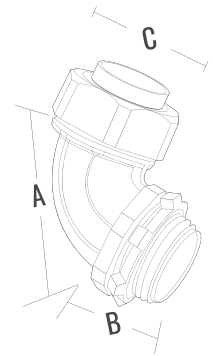

AMMO#	SIZE	A (in)	B (in)	C (in)	WEIGHT (lb)	INNER	MASTER	UPC
ARLTCN90-38MI	3/8"	2.541	0.536	1.120	0.26	10	100	840526221189
ARLTCN90-50MI	1/2"	2.749	0.543	1.241	0.28	10	100	840526221196
ARLTCN90-75MI	3/4"	2.977	0.580	1.503	0.42	10	100	840526221202
ARLTCN90-100MI	1"	3.644	0.675	1.763	0.60	5	50	840526221219
ARLTCN90-125MI	1-1/4"	4.138	0.695	2.248	1.06	2	20	840526221226
ARLTCN90-150MI	1-1/2"	4.635	0.694	2.471	1.14	2	20	840526221233
ARLTCN90-200MI	2"	5.347	0.729	3.007	1.82	1	10	840526221240
ARLTCN90-250MI	2-1/2"	8.217	1.056	3.654	4.70	-	1	840526221257
ARLTCN90-300MI	3"	9.18	1.104	4.471	6.32	-	1	840526221264
ARLTCN90-350MI	3-1/2"	9.871	1.163	4.942	8.93	-	1	840526221271
ARLTCN90-400MI	4"	10.757	1.155	5.501	10.10	-	1	840526221288

ELECTRICAL FITTINGS



1000 COMMERCE CENTER DR ELKTON MD 21921
PHONE : (718).338.1851 FAX : (718).228.1851
orders@ammoelectric.com

www.ammoelectric.com