

CATEGORY
VENTILATION
FANS AMMO ITEM #
ARSEPD140-3

Company: ______ #Item: _____ #Item: _____

Ventilator Fan DC motor With Humidity Sensor







DESCRIPTION

- Low sone Multiple speed ceiling mounted fan that's designed to operate continuously and quietly
- · It is ENERGY STAR approved and HVI certified
- It is also ETL and cETL certified to comply with ASHRAE 62.2 whole house fan to meet the minimum ventilation required by local building codes

FEATURES

- Multiple SPEED DC motor fan with low energy consumption
- Constant airflow suitable to static pressure up to 0.4sp LOW SPEED adjustable speed controller allows accurate cfm selection (0, 30 - Max CFM)
- TIME DELAY preset allows the fan to continue running for an additional 5 to 60 minutes
- CFM select setting for high speed (80CFM-110CFM-140CFM)
- Built in humidity sensor available for auto operation
- Motion sensor plug and play setting
- QUIET operates at lower rpm to ensure low sone levels
- · Power rating 120 volts and 60 Hz

HOUSING

- · Made of rugged 26 gauge galvanized steel
- Detachable 6" collar which include a light built in back draft damper
- · Heavy duty 4 point mounting bracket adjustable up to 24" centres

CRILLE


- · Made of a rugged polymeric resin that's known for it's durability
- · Premium grille offers low profile with elegance and simplicity
- · Comes with torsion spring clips for easy installation

COMPATIBILITY

For models ARCL01, ARCL10 & ARCL11

PACKAGING

۰	Weight:	4.01 kg
•	PKG:	1
•	UPC Number:	84052624066

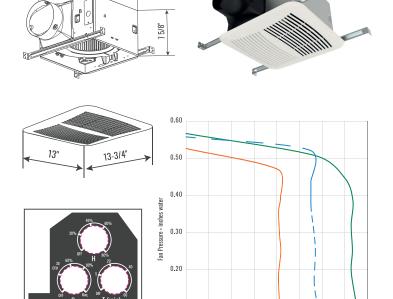

Static Pressure in inches w.g	0.1	0.25	0.1	0.25	0.1	0.25	
Air Volume (CFM)	}	80		110		140	
Noise (sones)	<0.3	N/A	<0.3	N/A	0.4	N/A	
Fan watts	5.6W		8.5W		13W		
Duct Diameter	6"						
Power Rating (V/Hz)	120/60						

0.10

0.00

VENTILATION FANS



CONTROL CENTRE

60.0 80.0 100.0 120.0 140.0 160.0

Fan Flow Rate - CFM Standard Air