



CATEGORY

VENTILATION  
FANS

AMMO ITEM #

ARSEPD200

Company: \_\_\_\_\_

Job: \_\_\_\_\_ #Item: \_\_\_\_\_

Notes: \_\_\_\_\_

# Ventilator Fan

## DC motor, Ultra Silent, High Performance

**DESCRIPTION**

- Ventilating fan should be ceiling mounted and capable of exhausting air quietly and efficiently
- The SEPD series is HVI and ENERGY STAR certified
- It comes with a DC motor which is known for its high efficiency and long lasting reliability. It holds an ETL evaluation and conforms to UL and cUL safety standards

**HOUSING**

- Made of rugged 26 GA galvanized steel
- Detachable 6 inch polymeric resin collar which includes a light weight built in back draft damper
- Double hanger bar mounting brackets that are adjustable up to 24 inch span allows for ideal positioning
- Housing size: 11-3/8"x10-1/2"x7-5/8"

**MOTOR/BLOWER**

- Plug in permanently lubricated motor- Engineered for continuous operation
- The motor is energy efficient and surpasses the minimum ENERGY STAR requirements for continuous duty operation
- Power rating should be 120 volts and 60 Hz
- Fan shall be ETL and cETL listed for tub/shower enclosure when used with a GFCI branch circuit
- Motor comes with a built in overload disconnect for safety and longer motor life
- Our Premium series operates at lower RPM's to give you quieter operation

**GRILLE**

- The grille is low profile that has elegance and still able to maintain its simplicity
- Made of a rugged polymeric resin that's known for its long life durability
- Grille dimension: 13"x13-3/4"

**COMPATIBILITY**



For models ARCL01, ARCL10 &amp; ARCL11

**TYPICAL SPECIFICATION**

- Ceiling ventilator shall have corrosion resistance galvanized steel housing with 4 point mounting capability
- It shall be ducted to a roof vent or wall cap using 6 inch round pipe
- Blower assembly shall be removable, have a centrifugal type blower wheel and a permanently lubricated motor designed for continuous operation
- Air and sound delivery shall meet the HVI certified ratings as per the fan curves attached

**PACKAGING**

- Weight: \_\_\_\_\_ 4.01 kg
- PKG: \_\_\_\_\_ 1
- UPC Number: \_\_\_\_\_ 840526240692

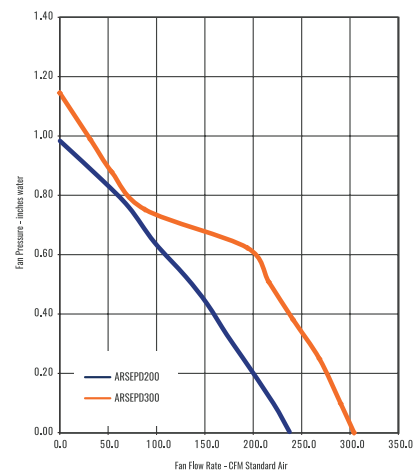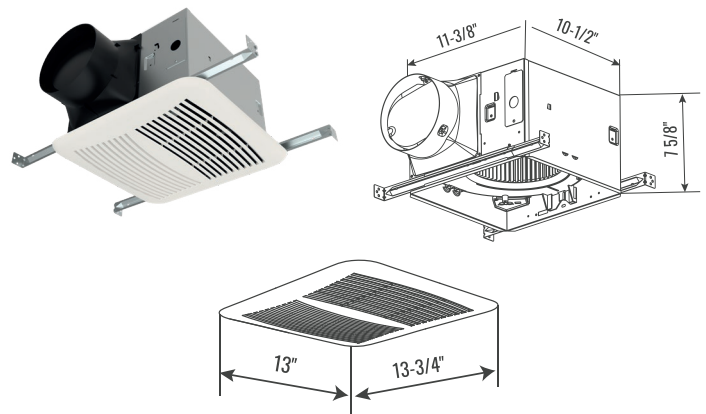

Static Pressure in inches w.g	0.1	0.25
Air Volume (CFM)	220	188
Noise (sones)	2.0	2.0
Fan watts	24W	
Duct Diameter	6"	
Power Rating (V/Hz)	120/60	

## VENTILATION FANS



1000 COMMERCE CENTER DR ELKTON MD 21921  
 PHONE : (718).338.1851 FAX : (718).228.1851  
 orders@ammoelectric.com

www.ammoelectric.com