



CATEGORY
**ELECTRICAL
BOXES**

AMMO ITEM #

AR228

Company: _____

Job: _____ #Item: _____

Notes: _____

4" Square Box, 1-1/2" Deep Three 1/2" KO's & One EKO, MS Bracket, Flush



APPLICATIONS

- Boxes are installed in walls or ceilings for lighting fixtures, switches or receptacles
- Used where multiple conductors runs are split into two or more directions to bring power to a number of electrical devices

FEATURES

- Welded steel construction with MS bracket that can position box on either side of stud and nonmetallic sheathed cable clamps
- Shallow 1-1/2 in deep steel box features built in clamps for (NMSC) nonmetallic sheathed cable
- Bracket is a snap to install. Place the bracket on the open side of the stud first
- Slots in the bracket engage the lip of the stud
- Knockouts allows for design and installation flexibility
- Combination Phillips / slotted screw heads

MATERIAL

Steel

CONFIGURATION


- Package Type: _____ Loose
- Knockouts: _____ Three 1/2 in & one EKO
- Cubic Capacity: _____ 21.0 cu in
- Fire rated walls: _____ 2 hour fire

MEASUREMENT

- Depth: _____ 1-1/2 in
- Width: _____ 5.62 in
- Height: _____ 4.50 in

PACKAGING

- Weight: _____ 0.87 lb
- PKG: _____ 24
- UPC number: _____ 840526200665

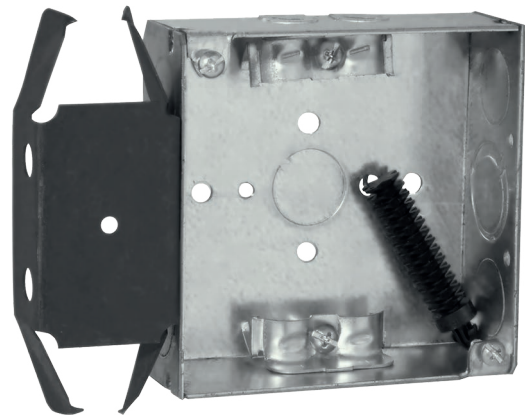

ELECTRICAL BOXES & COVERS



Ammo Electric Inc.

1000 COMMERCE CENTER DR ELKTON MD 21921

PHONE : (718).338.1851 FAX : (718).228.1851

orders@ammoelectric.com

www.ammoelectric.com