



CATEGORY

**NEC (Nipples,  
Elbows & Couplings)**

AMMO ITEM #

**ARALU-45**

Company: \_\_\_\_\_

Job: \_\_\_\_\_ #Item: \_\_\_\_\_

Notes: \_\_\_\_\_

## Rigid 45° Aluminum Elbow



### APPLICATION

For use in harsh or clean environments such as waste - water treatment, food processing, oil refineries, paper mills, and powerplants

### FEATURES


- Manufactured from 6063 aluminum alloy for lightweight and corrosion resistant protection
- Available from 1/2" thru 6"
- NPT threads are protected with color coded threaded end caps

### MATERIAL

6063 aluminum alloy

### CERTIFICATION

Standard: UL 6A ANSI C80.5

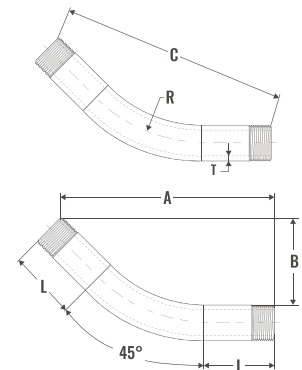

AMMO#	SIZE	A (in)	B (in)	C (in)	OD (in)	THICKNESS T (in)	STRAIGHT LENGTH L (in)	RADIUS R (in)	WEIGHT (g)	PKG	UPC
ARALU-5045	1/2"	6.799	2.816	7.359	0.840	0.104	2.500	4.000	87	50	837654113929
ARALU-7545	3/4"	7.449	3.085	8.063	1.050	0.107	2.717	4.500	126	50	837654113936
ARALU-10045	1"	8.574	3.551	9.280	1.315	0.126	2.913	5.750	217	35	837654113943
ARALU-12545	1-1/4"	10.059	4.167	10.887	1.660	0.130	3.233	7.250	334	30	837654113950
ARALU-15045	1-1/2"	11.009	4.560	11.916	1.900	0.134	3.425	8.250	463	15	837654113967
ARALU-20045	2"	13.203	5.469	14.291	2.375	0.142	4.291	9.500	732	15	837654113974
ARALU-25045	2-1/2"	15.548	6.440	16.829	2.875	0.185	5.354	10.500	1299	1	837654113981
ARALU-30045	3"	19.078	7.902	20.650	3.500	0.197	6.516	13.000	1935	1	837654113998
ARALU-35045	3-1/2"	21.023	8.708	22.755	4.000	0.207	6.930	15.000	2806	1	837654114001
ARALU-40045	4"	21.821	9.039	23.618	4.500	0.217	7.087	16.000	3480	1	837654114018

## NEC (Nipples, Elbows & Couplings)



400 MARTIN LUTHER KING JR WAY, BRIDGETON, NJ 08302  
PHONE : (718).338.1851 FAX : (718).228.1851  
orders@ammoelectric.com

www.ammoelectric.com