



CATEGORY  
**STRUT &  
 GROUND**  
 AMMO ITEM #

**ARBARREL-L**

Company: \_\_\_\_\_  
 Job: \_\_\_\_\_ #Item: \_\_\_\_\_  
 Notes: \_\_\_\_\_

# Compression Lugs Splices Long Barrel



AMMO#	WIRE RANGE	COLOR CODE	A (in)	B (mm)	WEIGHT (g)	INNER	MASTER	UPC
ARBARREL-8L	#8	Red	2.01	.172	8.47	100	1000	837654122822
ARBARREL-6L	#6	Blue	2.36	.203	8.73	100	1000	837654122839
ARBARREL-4L	#4	Gray	2.36	.250	10.38	100	1000	837654122846
ARBARREL-2L	#2	Brown	2.60	.315	16.41	50	500	837654122853
ARBARREL-10L	1/0	Pink	2.87	3.90	28.64	25	250	837654122860
ARBARREL-20L	2/0	Black	3.11	.441	30.40	25	250	837654122877
ARBARREL-30L	3/0	Orange	3.11	.492	35.90	25	250	837654122884
ARBARREL-40L	4/0	Purple	3.39	.547	53.10	25	250	837654122891
ARBARREL-250L	250 MCM	Yellow	3.39	.594	75.97	10	100	837654122907
ARBARREL-300L	300 MCM	White	4.13	.658	89.46	10	100	837654122914
ARBARREL-350L	350 MCM	Red	4.13	.700	112.69	10	100	837654122921
ARBARREL-400L	400 MCM	Blue	4.37	.764	130.92	10	100	837654122938
ARBARREL-500L	500 MCM	Brown	4.61	.835	202.86	5	50	837654122945
ARBARREL-600L	600 MCM	Green	5.35	.925	276.30	5	50	837654122952
ARBARREL-750L	750 MCM	Black	5.87	1.03	342.57	5	50	837654122969

### APPLICATIONS

- Suitable for use at voltages up to 35 KV provided connector is properly taped
- 5 KV is the maximum voltage in all bare splice applications
- Rated for copper conductors

### FEATURES


- Color coded
- Tin-plated to provide corrosion resistance
- Seamless, high conductivity copper tubing, suitable for heavy duty applications

### MATERIAL

E-Copper

### FINISH

Tin plated

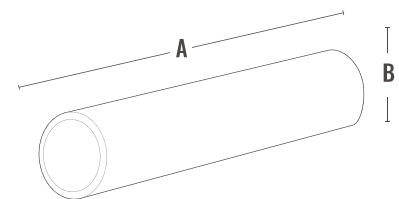

## STRUT & GROUND



400 MARTIN LUTHER KING JR WAY, BRIDGETON, NJ 08302  
 PHONE : (718).338.1851 FAX : (718).228.1851  
 orders@ammoelectric.com

www.ammoelectric.com