



CATEGORY
**ELECTRICAL
CONDUIT & WIRES**

AMMO ITEM #

LTM-UL

Company: _____

Job: _____ #Item: _____

Notes: _____

Flexible Steel Conduit

Used to provide protection from damage to electrical cables and other equipment



APPLICATIONS

Liquid Tight Flexible Metal Conduit is applicable for the protection of circuit with 600 volts or lower in locations where UL certificate is required, including commercial buildings, industrial / power plant, shipyards, marine or boat, computer rooms and etc

MATERIAL

Galvanized steel + PVC Jacket

FLEXIBILITY

Medium

TEMPERATURE RANGE

-10°C~+60°C Dry, 60° Wet, 60°C Oil

FIRE RETARDANT

Self-extinguishing

IP RATING

IP 40 IP 66

UV RESISTANCE

Yes

JACKET COLOR


Grey (Standard)

CERTIFICATE

UL (File No. E490004)

SUITABLE FOR USE IN HAZARDOUS (CLASSIFIED) LOCATIONS

- NEC Article 501.10 (B) (2) & 501.30 (B) Class II Div. 1; 502.10 (B) (2)
- NEC Article 502.10 (A) (2) & 502.30 (B) Class II Div. 1; 502.10 (B) (2) Class II Div. 2
- NEC Article 503.10 (A) (2) & 503.30 (B) Class III Div. 1; 503.10 (A) (2) Class III Div. 2

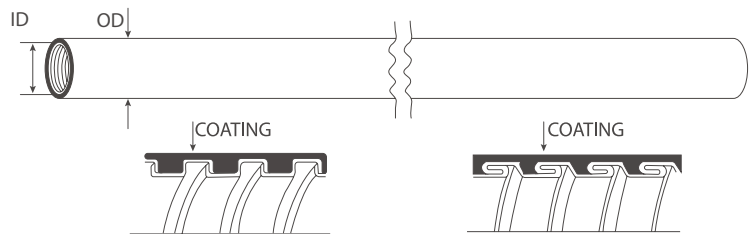

AMMO#	SIZE	ID (mm)		OD (mm)		ROLL (m)	MEASUREMENT (LxWxH mm)	WEIGHT (kg / coil)	PKG FT	UPC
		MIN	MAX	MIN	MAX					
LTM-50UL	1/2"	15.80	16.31	20.80	21.30	30.5	440*440*160	13.5	100	837654071830
LTM-75UL	3/4"	20.83	21.34	25.20	26.70	30.5	500*500*180	17	100	837654071878
LTM-100UL	1"	26.44	27.08	32.80	33.40	30.5	600*600*300	23.5	100	837654071816
LTM-125UL	1-1/4"	35.05	41.40	41.40	42.20	15.3	750*750*130	15	50	837654073032
LTM-150UL	1-1/2"	40.01	40.64	47.40	48.30	15.3	750*750*250	23	50	837654071823
LTM-200UL	2"	51.31	51.94	59.40	60.30	7.6	900*900*120	26.5	50	837654071847
LTM-250UL	2-1/2"	62.99	63.63	72.10	73.00	7.6	1000*1000*150	19.5	25	837654071854
LTM-300UL	3"	77.98	78.74	87.90	88.90	7.6	1100*1100*180	26.5	25	837654071861
LTM-350UL	3-1/2"	88.90	89.92	100.6	101.6	7.6	1125*1125*130	31	25	837654089101
LTM-400UL	4"	101.60	102.62	113.30	114.30	7.6	1125*1125*230	36.5	25	837654071885

ELECTRICAL CONDUIT AND WIRES



400 MARTIN LUTHER KING JR WAY, BRIDGETON, NJ 08302
PHONE : (718).338.1851 FAX : (718).228.1851
orders@ammoelectric.com

www.ammoelectric.com