

CATEGORY
VENTILATION
FANS AMMO ITEM #
ARSNPD100-3

Company: ________ #Item: ______ #Item: _____

Ventilator Fan DC motor

DESCRIPTION

- Low sone Multiple speed ceiling mounted fan that's designed to operate continuously and quietly
- · It is ENERGY STAR approved and HVI certified
- It is also ETL and cETL certified to comply with ASHRAE 62.2 whole house fan to meet the minimum ventilation required by local building codes

HOUSING

- · Made of rugged 26 GA galvanized steel
- Detachable 4 inch polymeric collar which includes a light weight built in back draft damper
- Housing size: 9"x9"x5 3/4"

MOTOR/BLOWER

- · Total enclosed brushless EC motor designed to operate continuously
- Power rating should be 120 volts and 60 Hz
- Comes with a built in overload disconnect for safety and longer motor life

GRILLE

- The grille is low profile that has elegance and still able to maintain its simplicity
- · Premium grille offers low profile with elegance and simplicity
- Grille dimension:11-13/16 x11-7/16

COMPATIBILITY

For model ARGV-BL07

TYPICAL SPECIFICATION

- · Ceiling ventilator shall have corrosion resistance galvanized steel
- Continuous adjustable low speed operation allows accurate CFM sellection
- Built in toggle switch for high speeds (50CFM/80CFM/100CFM) selection
- Blower assembly shall be removable, have a centrifugal type blower wheel and a permanently lubricated motor designed for continuous operation
- Includes an attachable non metallic collar with build in back draft damper
- Air and sound delivery shall meet the ENERGY STAR, HVI certified ratings as per the fan curves attached


PACKAGING


FAGRACING	
Weight:	3.3 kg
• PKG:	1
UPC Number:	84052624071








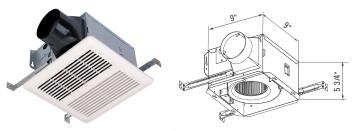





Static Pressure in inches w.g	0.1	0.25	0.1	0.25	0.1	0.25		
Air Volume (CFM)	į	50		80		100		
Noise (sones)	<0.3	N/A	0.5	N/A	1.0	N/A		
Fan watts	3.4	5.9	6.1	9.6	9.7	13		
Duct Diameter	4"							
Power Rating (V/Hz)	120/60							

VENTILATION FANS

