

CATEGORY
VENTILATION
FANS
AMMO ITEM #

ARSP80

Company: ______ #Item: _____ #Notes: ____

Ventilator Fan AC motor, Ultra Silent, High Performance







DESCRIPTION

- Very quiet fan for ceiling mounted Hold and ETL evaluation and confirm to UL and cUL safety standards. HVI and ENERGY STAR certified
- It comes with a capacitor start motor which is known for its high efficiency and long lasting reliability
- It holds an ETL evaluation and conforms to UL and cUL safety standards

HOUSING

- Made of rugged 26 GA galvanized steel
- Detachable 4 inch polymeric collar which includes a light weight built in back draft damper
- Housing size:7-1/2"x7-1/4"x5-5/8"

MOTOR/BLOWER

- Plug in permanently lubricated motor- Engineered for continuous operation
- Power rating should be 120 volts and 60 Hz
- Motor comes with a built in overload disconnect for safety and longer motor life

GRILLE


- The grille is low profile that has elegance and still able to maintain its simplicity
- Grille dimension:8-5/8"x9-1/2"


TYPICAL SPECIFICATION


- Ceiling ventilator shall have corrosion resistance galvanized steel
- It shall be ducted to a roof vent or wall cap using 4 inch round pipe
- Blower assembly shall be removable, have a centrifugal type blower wheel and a permanently lubricated motor designed for continuous operation
- Includes an attachable non metallic collar with build in back draft damper
- Air and sound delivery shall meet, HVI certified ratings as per the fan curves attached.

PACKAGING

•	Weight:	5.5 lb
•	PKG:	1
•	UPC Number:	840526240623

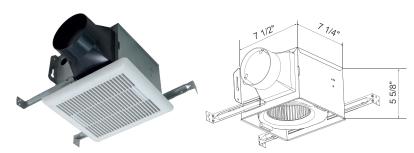





Static Pressure in inches w.g	0.1	0.25	
Air Volume (CFM)	80	71	
Noise (sones)	1.0	N/A	
Fan watts	22W	N/A	
Duct Diameter	4	4"	
Power Rating (V/Hz)	120	120/60	

VENTILATION FANS

